

ISO 9001:2015 (Certified Company)

MICRO TECH (INDIA) ENGINEERING

WEBSITE:-


E-MAIL:- microtech77@yahoo.com

MOBILE:- +91 9825869626




2M HTD PITCH

6MM BELT WIDTH

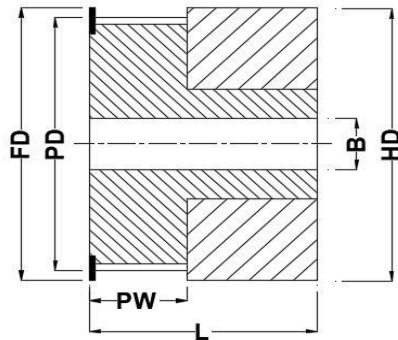

TYPE - 0F

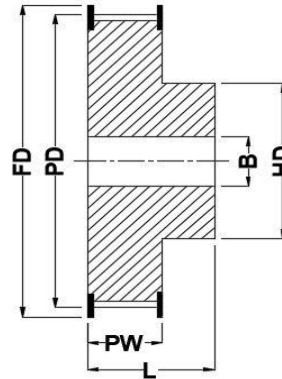

TYPE - 2F

2M Pitch (HTD) Timing pulley									
SUITABLE FOR BELT WIDTH 06MM									
Pulley Size	No. Of Teeth	Pulley Type		Pitch Dia	Flange Dia	Pitch Width	Hub Dia	Length	Min. Bore
Size	Teeth	Type	Material	PD	FD	PW	HD	L	B
16-2M-06	16	0F	ALU	10.19	15	8.50	15	16	4
18-2M-06	18	0F	ALU	11.46	16	8.50	16	16	4
20-2M-06	20	0F	ALU	12.73	16	8.50	16	16	5
22-2M-06	22	0F	ALU	14.01	17	8.50	17	16	5
24-2M-06	24	2F	ALU	15.28	20	11.00	10	16	5
28-2M-06	28	2F	ALU	17.83	25	11.00	11	16	5
30-2M-06	30	2F	ALU	19.10	25	11.00	12	16	5
32-2M-06	32	2F	ALU	20.37	25	11.00	14	16	5
36-2M-06	36	2F	ALU	22.92	28	11.00	16	16	5
40-2M-06	40	2F	ALU	25.46	32	11.00	18	16	5
42-2M-06	42	2F	ALU	26.74	32	11.00	18	16	5
44-2M-06	44	2F	ALU	28.01	37	11.00	18	16	5
48-2M-06	48	2F	ALU	30.56	37	11.00	20	16	5
60-2M-06	60	2F	ALU	38.20	44	11.00	24	16	5
72-2M-06	72	2F	ALU	45.84	52	11.00	33	16	6

ISO 9001:2015 (Certified Company)

MICRO TECH (INDIA) ENGINEERING

WEBSITE:-


E-MAIL:- microtech77@yahoo.com

MOBILE:- +91 9825869626




3M HTD PITCH


6MM BELT WIDTH

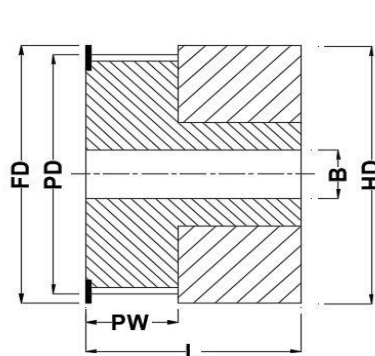

TYPE - 0F



TYPE - 2F



TYPE - 2

3M Pitch (HTD) Timing pulley

Suitable for Belt Width 06mm

Pulley Size	No. Of Teeth	Pulley Type		Pitch Dia	Flange Dia	Pitch Width	Hub Dia.	Length	Min. Bore
Size	Teeth	Type	Material	PD	FD	PW	HD	L	B
10-3M-06	10	0F	ALU	9.55	13.0	7.2	13.0	14.5	4
12-3M-06	12	0F	ALU	11.46	15.0	7.2	15.0	14.5	4
14-3M-06	14	0F	ALU	13.37	16.0	7.2	16.0	14.5	4
15-3M-06	15	0F	ALU	14.32	17.5	7.2	17.5	14.5	5
16-3M-06	16	2F	ALU	15.28	18.0	9.8	10.0	17.5	5
18-3M-06	18	2F	ALU	17.19	19.5	9.8	11.0	17.5	6
20-3M-06	20	2F	ALU	19.10	23.0	9.8	13.0	17.5	6
21-3M-06	21	2F	ALU	20.05	25.0	9.8	14.0	17.5	6
22-3M-06	22	2F	ALU	21.01	25.0	9.8	14.0	17.5	6
24-3M-06	24	2F	ALU	22.92	25.0	9.8	14.0	17.5	6
26-3M-06	26	2F	ALU	24.83	28.0	9.8	16.0	17.5	6
28-3M-06	28	2F	ALU	26.74	32.0	9.8	18.0	17.5	6
30-3M-06	30	2F	ALU	28.65	32.0	9.8	20.0	17.5	6
32-3M-06	32	2F	ALU	30.56	36.0	9.8	22.0	17.5	6
36-3M-06	36	2F	ALU	34.38	38.0	10.3	26.0	18.0	6
40-3M-06	40	2F	ALU	38.20	42.0	10.3	28.0	18.0	6
44-3M-06	44	2F	ALU	42.02	48.0	10.3	33.0	18.0	8
48-3M-06	48	2	ALU	45.84		10.3	33.0	18.6	8
60-3M-06	60	2	ALU	57.30		10.3	33.0	18.6	8
72-3M-06	72	2	ALU	68.75		10.3	33.0	18.6	8

ISO 9001:2015 (Certified Company)

MICRO TECH (INDIA) ENGINEERING

WEBSITE:-


E-MAIL:- microtech77@yahoo.com

MOBILE:- +91 9825869626




3M HTD PITCH


9MM BELT WIDTH

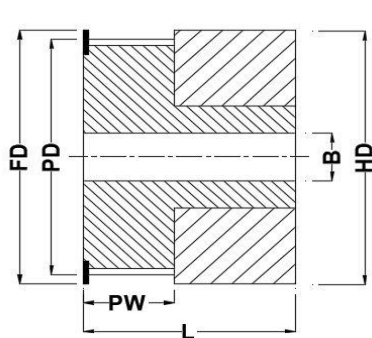

TYPE - 0F



TYPE - 2F



TYPE - 2

3M Pitch (HTD) Timing pulley									
Suitable for Belt Width 09mm									
Pulley Size	No. Of Teeth	Pulley Type		Pitch Dia	Flange Dia	Pulley Width	Hub Dia.	Length	Min. Bore
Size	Teeth	Type	Material	PD	FD	PW	HD	L	B
10-3M-09	10	0F	ALU	9.55	13.0	10.2	13.0	17.5	4
12-3M-09	12	0F	ALU	11.46	15.0	10.2	15.0	17.5	4
14-3M-09	14	0F	ALU	13.37	16.0	10.2	16.0	17.5	4
15-3M-09	15	0F	ALU	14.32	17.5	10.2	17.5	17.5	5
16-3M-09	16	2F	ALU	15.28	18.0	12.8	10.0	20.6	5
18-3M-09	18	2F	ALU	17.19	19.5	12.8	11.0	20.6	6
20-3M-09	20	2F	ALU	19.10	23.0	12.8	13.0	20.6	6
21-3M-09	21	2F	ALU	20.05	25.0	12.8	14.0	20.6	6
22-3M-09	22	2F	ALU	21.01	25.0	12.8	14.0	20.6	6
24-3M-09	24	2F	ALU	22.92	25.0	12.8	14.0	20.6	6
26-3M-09	26	2F	ALU	24.83	28.0	12.8	16.0	20.6	6
28-3M-09	28	2F	ALU	26.74	32.0	12.8	18.0	20.6	6
30-3M-09	30	2F	ALU	28.65	32.0	12.8	20.0	20.6	6
32-03-09	32	2F	ALU	30.56	36.0	12.8	22.0	20.6	6
36-3M-09	36	2F	ALU	34.38	38.0	13.4	26.0	22.2	6
40-3M-09	40	2F	ALU	38.20	42.0	13.4	28.0	22.2	6
44-3M-09	44	2F	ALU	42.02	48.0	13.4	33.0	22.2	8
48-3M-09	48	2	ALU	45.84		13.4	33.0	22.2	8
60-3M-09	60	2	ALU	57.30		13.4	33.0	22.2	8
72-3M-09	72	2	ALU	68.75		13.4	33.0	22.2	8

ISO 9001:2015 (Certified Company)

MICRO TECH (INDIA) ENGINEERING

WEBSITE:-


E-MAIL:- microtech77@yahoo.com

MOBILE:- +91 9825869626




3M HTD PITCH


15MM BELT WIDTH

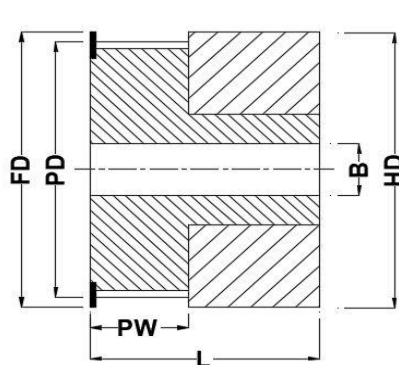

TYPE - 0F

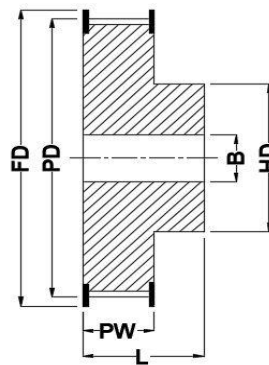

TYPE - 2F



TYPE - 2

3M Pitch (HTD) Timing pulley

Suitable for Belt Width 15mm

Pulley Size	No. Of Teeth	Pulley Type		Pitch Dia	Flange Dia	Pulley Width	Hub Dia.	Langth	Min. Bore
Size	Teeth	Type	Material	PD	FD	PW	HD	L	B
10-3M-15	10	0F	ALU	9.55	13.0	17.0	13.0	26.0	4
12-3M-15	12	0F	ALU	11.46	15.0	17.0	15.0	26.0	4
14-3M-15	14	0F	ALU	13.37	16.0	17.0	16.0	26.0	4
15-3M-15	15	0F	ALU	14.32	17.5	17.0	17.5	26.0	5
16-3M-15	16	2F	ALU	15.28	18.0	19.5	10.0	26.0	5
18-3M-15	18	2F	ALU	17.19	19.5	19.5	11.0	26.0	6
20-3M-15	20	2F	ALU	19.10	23.0	19.5	13.0	26.0	6
21-3M-15	21	2F	ALU	20.05	25.0	19.5	14.0	26.0	6
22-3M-15	22	2F	ALU	21.01	25.0	19.5	14.0	26.0	6
24-3M-15	24	2F	ALU	22.92	25.0	19.5	14.0	26.0	6
26-3M-15	26	2F	ALU	24.83	28.0	19.5	16.0	26.0	6
28-3M-15	28	2F	ALU	26.74	32.0	19.5	18.0	26.0	6
30-3M-15	30	2F	ALU	28.65	32.0	19.5	20.0	26.0	6
32-3M-15	32	2F	ALU	30.56	36.0	19.5	22.0	26.0	6
36-3M-15	36	2F	ALU	34.38	38.0	20.0	26.0	30.0	6
40-3M-15	40	2F	ALU	38.20	42.0	20.0	28.0	30.0	6
44-3M-15	44	2F	ALU	42.02	48.0	20.0	33.0	30.0	8
48-3M-15	48	2	ALU	45.84		20.0	33.0	30.0	8
60-3M-15	60	2	ALU	57.30		20.0	33.0	30.0	8
72-3M-15	72	2	ALU	68.75		20.0	33.0	30.0	8

ISO 9001:2015 (Certified Company)

MICRO TECH (INDIA) ENGINEERING

WEBSITE:-


E-MAIL:- microtech77@yahoo.com

MOBILE:- +91 9825869626




5M HTD PITCH

9MM BELT WIDTH

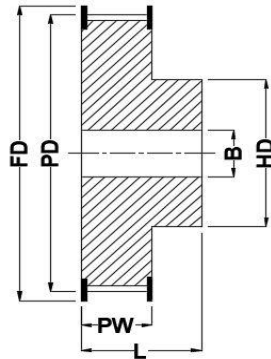

TYPE - 2F



TYPE - 2

5M Pitch (HTD) Timing pulley									
Suitable for Belt Width 09mm									
Pulley Size	No. Of Teeth	Pulley Type		Pitch Dia	Flange Dia	Pulley Width	Hub Dia.	Langth	Min Bore
Size	Teeth	Type	Material	PD	FD	PW	HD	L	B
12-5M-09	12	2F	Alu	19.10	23.0	14.5	13.0	20.0	5
14-5M-09	14	2F	Alu	22.28	25.0	14.5	14.0	20.0	6
15-5M-09	15	2F	Alu	23.87	28.0	14.5	16.0	20.0	6
16-5M-09	16	2F	Alu	25.46	28.0	14.5	16.5	20.0	6
18-5M-09	18	2F	Alu	28.65	32.0	14.5	20.0	20.0	6
20-5M-09	20	2F	Alu	31.83	36.0	14.5	23.0	22.5	6
21-5M-09	21	2F	Alu	33.42	38.0	14.5	24.0	22.5	6
22-5M-09	22	2F	Alu	35.01	38.0	14.5	25.5	22.5	6
24-5M-09	24	2F	Alu	38.20	42.0	14.5	27.0	22.5	6
26-5M-09	26	2F	Alu	41.38	44.0	14.5	30.0	22.5	6
28-5M-09	28	2F	Alu	44.56	48.0	14.5	30.5	22.5	6
30-5M-09	30	2F	Alu	47.75	51.0	14.5	35.0	22.5	6
32-5M-09	32	2F	Alu	50.93	54.0	14.5	38.0	22.5	8
36-5M-09	36	2F	Alu	57.30	60.0	14.5	38.0	22.5	8
40-5M-09	40	2F	Alu	63.66	71.0	14.5	38.0	22.5	8
44-5M-09	44	2	Alu	70.03		14.5	38.0	25.5	8
48-5M-09	48	2	Alu	76.39		14.5	45.0	25.5	8
60-5M-09	60	2	Alu	95.49		14.5	45.0	25.5	8
72-5M-09	72	2	Alu	114.59		14.5	45.0	25.5	8

ISO 9001:2015 (Certified Company)

MICRO TECH (INDIA) ENGINEERING

WEBSITE:-


E-MAIL:- microtech77@yahoo.com

MOBILE:- +91 9825869626




5M HTD PITCH

15MM BELT WIDTH

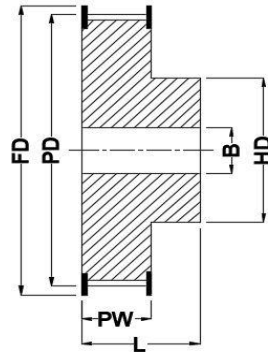

TYPE - 2F



TYPE - 2

5M Pitch (HTD) Timing pulley									
Suitable for Belt Width 15mm									
Pulley Size	No. Of Teeth	Pulley Type		Pitch Dia	Flange Dia	Pulley Width	Hub Dia.	Langth	Min Bore
Size	Teeth	Type	Material	PD	FD	PW	HD	L	B
12-5M-15	12	2F	Alu	19.10	25.0	20.5	13.0	26.0	5
14-5M-15	14	2F	Alu	22.28	25.0	20.5	14.0	26.0	6
15-5M-15	15	2F	Alu	23.87	28.0	20.5	16.0	26.0	6
16-5M-15	16	2F	Alu	25.46	28.0	20.5	16.5	26.0	6
18-5M-15	18	2F	Alu	28.65	32.0	20.5	20.0	26.0	6
20-5M-15	20	2F	Alu	31.83	36.0	20.5	23.0	26.0	6
21-5M-15	21	2F	Alu	33.42	38.0	20.5	24.0	26.0	6
22-5M-15	22	2F	Alu	35.01	38.0	20.5	25.5	26.0	6
24-5M-15	24	2F	Alu	38.20	42.0	20.5	27.0	28.0	6
26-5M-15	26	2F	Alu	41.38	44.0	20.5	30.0	28.0	6
28-5M-15	28	2F	Alu	44.56	48.0	20.5	30.5	28.0	6
30-5M-15	30	2F	Alu	47.75	51.0	20.5	35.0	28.0	8
32-5M-15	32	2F	Alu	50.93	54.0	20.5	38.0	28.0	8
36-5M-15	36	2F	Alu	57.30	60.0	20.5	38.0	28.0	8
40-5M-15	40	2F	Alu	63.66	71.0	20.5	38.0	28.0	8
44-5M-15	44	2	Alu	70.03		20.5	38.0	30.0	8
48-5M-15	48	2	Alu	76.39		20.5	38.0	30.0	8
60-5M-15	60	2	Alu	95.49		20.5	50.0	30.0	8
72-5M-15	72	2	Alu	114.59		20.5	50.0	30.0	8

ISO 9001:2015 (Certified Company)

MICRO TECH (INDIA) ENGINEERING

WEBSITE:-


E-MAIL:- microtech77@yahoo.com

MOBILE:- +91 9825869626




5M HTD PITCH

25MM BELT WIDTH

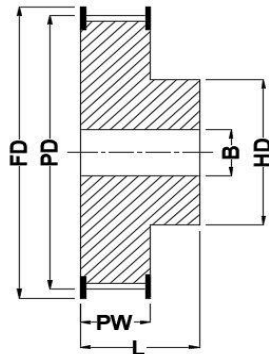

TYPE - 2F

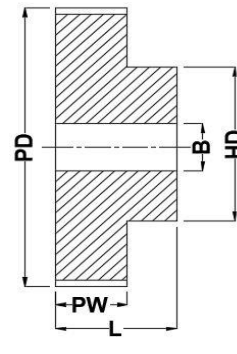

TYPE - 2

5M Pitch (HTD) Timing pulley									
Suitable for Belt Width 25mm									
Pulley Size	No. Of Teeth	Pulley Type		Pitch Dia	Flange Dia	Pulley Width	Hub Dia.	Langth	Min Bore
Size	Teeth	Type	Material	PD	FD	PW	HD	L	B
12-5M-25	12	2F	Alu	19.10	25.0	30.0	13.0	36.0	5
14-5M-25	14	2F	Alu	22.28	25.0	30.0	14.0	36.0	6
15-5M-25	15	2F	Alu	23.87	28.0	30.0	16.0	36.0	6
16-5M-25	16	2F	Alu	25.46	28.0	30.0	16.5	36.0	6
18-5M-25	18	2F	Alu	28.65	32.0	30.0	20.0	36.0	6
20-5M-25	20	2F	Alu	31.83	36.0	30.0	23.0	36.0	6
21-5M-25	21	2F	Alu	33.42	38.0	30.0	24.0	38.0	6
22-5M-25	22	2F	Alu	35.01	38.0	30.0	25.5	38.0	6
24-5M-25	24	2F	Alu	38.20	42.0	30.0	27.0	38.0	6
26-5M-25	26	2F	Alu	41.38	44.0	30.0	30.0	38.0	6
28-5M-25	28	2F	Alu	44.56	48.0	30.0	30.5	38.0	6
30-5M-25	30	2F	Alu	47.75	51.0	30.0	35.0	38.0	6
32-5M-25	32	2F	Alu	50.93	54.0	30.0	38.0	38.0	8
36-5M-25	36	2F	Alu	57.30	60.0	30.0	38.0	38.0	8
40-5M-25	40	2F	Alu	63.66	71.0	30.0	38.0	38.0	8
44-5M-25	44	2	Alu	70.03		30.0	38.0	40.0	8
48-5M-25	48	2	Alu	76.39		30.0	38.0	40.0	8
60-5M-25	60	2	Alu	95.49		30.0	50.0	40.0	8
72-5M-25	72	2	Alu	114.59		30.0	50.0	40.0	8

ISO 9001:2015 (Certified Company)

MICRO TECH (INDIA) ENGINEERING

WEBSITE:-


E-MAIL:- microtech77@yahoo.com

MOBILE:- +91 9825869626




8M HTD PITCH


20MM BELT WIDTH



TYPE - 2F



TYPE - 2WF



TYPE - 2A

8M Pitch (HTD) Timing pulley

Suitable for Belt Width 20mm

Pulley size	No. Of Teeth	Pulley Type		Pitch Dia.	Flange Dia.	Pulley Width	Hub Dia.		Length	Min. Bore
Size	Teeth	Type	Material	PD	FD	PW	HD	DI	L	B
22-8m-20	22	2F	St	56.02	60	28	43		38	12
24-8M-20	24	2F	St	61.12	66	28	45		38	12
26-8M-20	26	2F	St	66.21	71	28	50		38	12
28-8M-20	28	2F	St	71.30	75	28	50		38	15
30-8M-20	30	2F	St	76.39	83	28	55		38	15
32-8M-20	32	2F	St	81.49	87	28	60		38	15
34-8M-20	34	2F	St	86.58	91	28	70		38	15
36-8M-20	36	2F	St	91.67	98	28	70		38	15
38-8M-20	38	2F	St	96.77	103	28	75		38	15
40-8M-20	40	2F	St	101.86	106	28	75		38	18
44-8M-20	44	2F	St	112.05	119	28	75		38	18
48-8M-20	48	2F	St	122.23	127	28	75		38	18
56-8M-20	56	2WF	St	142.60	148	28	80	115	38	18
64-8M-20	64	2WF	St	162.97	168	28	80	135	38	18
72-8M-20	72	2WF	St	183.35	192	28	80	155	38	18
80-8M-20	80	2A	GG	203.72		28	90	180	38	18
90-8M-20	90	2A	GG	229.18		28	90	200	38	18
112-8M-20	112	2A	GG	285.21		28	90	250	38	18
144-8M-20	144	2A	GG	366.69		28	90	330	38	20
168-8M-20	168	2A	GG	427.81		28	100	400	38	20
192-8M-20	192	2A	GG	488.92		28	100	460	38	20

ISO 9001:2015 (Certified Company)

MICRO TECH (INDIA) ENGINEERING

WEBSITE:-


E-MAIL:- microtech77@yahoo.com

MOBILE:- +91 9825869626




8M HTD PITCH


30MM BELT WIDTH



TYPE - 2F



TYPE - 2WF



TYPE - 2A

8M Pitch (HTD) Timing pulley

Suitable for Belt Width 30mm

Pulley size	No. Of Teeth	Pulley Type		Pitch Dia.	Flange Dia.	Pulley Width	Hub Dia.		Length	Min. Bore
Size	Teeth	Type	Material	PD	FD	PW	HD	DI	L	B
22-8M-30	22	2F	St	56.02	60	38	43		48	12
24-8M-30	24	2F	St	61.12	66	38	45		48	12
26-8M-30	26	2F	St	66.21	71	38	50		48	12
28-8M-30	28	2F	St	71.30	75	38	50		48	15
30-8M-30	30	2F	St	76.39	83	38	55		48	15
32-8M-30	32	2F	St	81.49	87	38	60		48	15
34-8M-30	34	2F	St	86.58	91	38	70		48	15
36-8M-30	36	2F	St	91.67	98	38	70		48	15
38-8M-30	38	2F	St	96.77	103	38	75		48	15
40-8M-30	40	2F	St	101.86	106	38	75		48	15
44-8M-30	44	2F	St	112.05	119	38	75		48	15
48-8M-30	48	2F	St	122.23	127	38	75		48	15
56-8M-30	56	2WF	St	142.60	148	38	90	115	48	15
64-8M-30	64	2WF	St	162.97	168	38	90	135	48	15
72-8M-30	72	2WF	St	183.35	192	38	95	155	48	15
80-8M-30	80	2A	GG	203.72		38	100	180	48	15
90-8M-30	90	2A	GG	229.18		38	100	200	48	15
112-8M-30	112	2A	GG	285.21		38	100	250	48	18
144-8M-30	144	2A	GG	366.69		38	100	330	48	20
168-8M-30	168	2A	GG	427.81		38	100	400	48	20
192-8M-30	192	2A	GG	488.92		38	100	460	48	20

ISO 9001:2015 (Certified Company)

MICRO TECH (INDIA) ENGINEERING

WEBSITE:-


E-MAIL:- microtech77@yahoo.com

MOBILE:- +91 9825869626




8M HTD PITCH


50MM BELT WIDTH



TYPE - 2F



TYPE - 2WF



TYPE - 2A

8M Pitch (HTD) Timing pulley

Suitable for Belt Width 50mm

Pulley size	No. Of Teeth	Pulley Type		Pitch Dia.	Flange Dia.	Pulley Width	Hub Dia.		Length	Min. Bore
Size	Teeth	Type	Material	PD	FD	PW	HD	DI	L	B
22-8M-50	22	2F	St	56.02	60	60	43		70	12
24-8M-50	24	2F	St	61.12	66	60	45		70	12
26-8M-50	26	2F	St	66.21	71	60	50		70	12
28-8M-50	28	2F	St	71.30	75	60	50		70	15
30-8M-50	30	2F	St	76.39	83	60	55		70	15
32-8M-50	32	2F	St	81.49	87	60	60		70	15
34-8M-50	34	2F	St	86.58	91	60	70		70	15
36-8M-50	36	2F	St	91.67	98	60	70		70	15
38-8M-50	38	2F	St	96.77	103	60	75		70	15
40-8M-50	40	2F	St	101.86	106	60	75		70	18
44-8M-50	44	2F	St	112.05	119	60	75		70	18
48-8M-50	48	2F	St	122.23	127	60	80		70	18
56-8M-50	56	2WF	St	142.60	148	60	90	115	60	18
64-8M-50	64	2WF	St	162.97	168	60	100	135	60	18
72-8M-50	72	2WF	St	183.35	192	60	100	155	60	18
80-8M-50	80	2A	GG	203.72		60	110	180	60	18
90-8M-50	90	2A	GG	229.18		60	110	200	60	18
112-8M-50	112	2A	GG	285.21		60	110	250	60	18
144-8M-50	144	2A	GG	366.69		60	110	330	60	20
168-8M-50	168	2A	GG	427.81		60	120	400	60	20
192-8M-50	192	2A	GG	488.92		60	130	460	60	20

ISO 9001:2015 (Certified Company)

MICRO TECH (INDIA) ENGINEERING

WEBSITE:-


E-MAIL:- microtech77@yahoo.com

MOBILE:- +91 9825869626




8M HTD PITCH


85MM BELT WIDTH



TYPE - 2F



TYPE - 2WF



TYPE - 2A

8M Pitch (HTD) Timing pulley

Suitable for Belt Width 85mm

Pulley size	No. Of Teeth	Pulley Type		Pitch Dia.	Flange Dia.	Pulley Width	Hub Dia.		Length	Min. Bore
Size	Teeth	Type	Material	PD	FD	PW	HD	DI	L	B
22-8M-85	22	2F	St	56.02	60	95	43		105	12
24-8M-85	24	2F	St	61.12	66	95	45		105	12
26-8M-85	26	2F	St	66.21	71	95	50		105	12
28-8M-85	28	2F	St	71.30	75	95	50		105	15
30-8M-85	30	2F	St	76.39	83	95	55		105	15
32-8M-85	32	2F	St	81.49	87	95	60		105	15
34-8M-85	34	2F	St	86.58	91	95	70		105	15
36-8M-85	36	2F	St	91.67	98	95	70		105	15
38-8M-85	38	2F	St	96.77	103	95	75		105	15
40-8M-85	40	2F	St	101.86	106	95	75		105	18
44-8M-85	44	2F	St	112.05	119	95	75		105	18
48-8M-85	48	2F	St	122.23	127	95	80		105	18
56-8M-85	56	2WF	St	142.60	148	95	80	115	105	20
64-8M-85	64	2WF	St	162.97	168	95	100	135	95	20
72-8M-85	72	2WF	St	183.35	192	95	110	155	95	20
80-8M-85	80	2A	GG	203.72		95	110	180	95	20
90-8M-85	90	2A	GG	229.18		95	110	200	95	20
112-8M-85	112	2A	GG	285.21		95	110	250	95	24
144-8M-85	144	2A	GG	366.69		95	120	330	95	24
168-8M-85	168	2A	GG	427.81		95	120	400	95	24
192-8M-85	192	2A	GG	488.92		95	130	460	95	24

ISO 9001:2015 (Certified Company)

MICRO TECH (INDIA) ENGINEERING

WEBSITE:-


E-MAIL:- microtech77@yahoo.com

MOBILE:- +91 9825869626




14M HTD PITCH


40MM BELT WIDTH

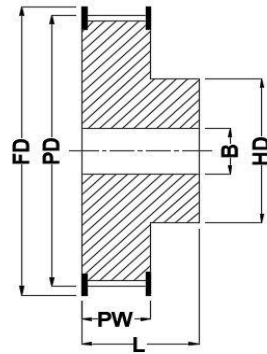

TYPE - 2F



TYPE - 2WF



TYPE - 2A

14M Pitch (HTD) Timing pulley										
Suitable Belt Width 40mm										
Pulley Size	No. Of Teeth	Pulley Type		Pitch Dia	Flange Dia	Pulley Width	Hub Dia.		Length	Min. Bore
Size	Teeth	Type	Material	PD	FD	PW	HD	DI	L	B
28-14M-40	28	2F	St	124.78	127	54	100		69	24
30-14M-40	30	2F	St	133.69	138	54	100		69	24
32-14M-40	32	2F	St	142.60	154	54	100		69	24
34-14M-40	34	2F	St	151.52	160	54	100		69	24
36-14M-40	36	2F	St	160.43	168	54	100		69	24
38-14M-40	38	2F	St	169.34	183	54	120		69	24
40-14M-40	40	2F	St	178.25	188	54	120		69	24
44-14M-40	44	2F	St	196.08	211	54	120		69	24
48-14M-40	48	2WF	GG	213.90	226	54	135	170	69	24
56-14M-40	56	2WF	GG	249.55	256	54	135	207	69	28
64-14M-40	64	2WF	GG	285.21	296	54	135	240	69	28
72-14M-40	72	2A	GG	320.86		54	135	278	69	28
80-14M-40	80	2A	GG	356.51		54	135	314	69	28
90-14M-40	90	2A	GG	401.07		54	135	358	69	28
112-14M-40	112	2A	GG	499.11		54	135	456	69	28
144-14M-40	144	2A	GG	641.71		54	135	600	69	28
168-14M-40	168	2A	GG	748.66		54	135	706	69	28
192-14M-40	192	2A	GG	855.62		54	135	813	69	28

ISO 9001:2015 (Certified Company)

MICRO TECH (INDIA) ENGINEERING

WEBSITE:-


E-MAIL:- microtech77@yahoo.com

MOBILE:- +91 9825869626




14M HTD PITCH


55MM BELT WIDTH

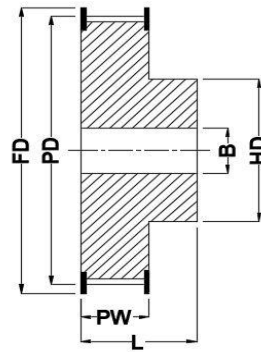

TYPE - 2F



TYPE - 3WF



TYPE - 3A

14M Pitch (HTD) Timing pulley										
Suitable Belt Width 55mm										
Pulley Size	No. Of Teeth	Pulley Type		Pitch Dia	Flange Dia	Pulley Width	Hub Dia.		Length	Min. Bore
Size	Teeth	Type	Material	PD	FD	PW	HD	DI	L	B
28-14M-55	28	2F	St	124.78	127	70	100		85	24
30-14M-55	30	2F	St	133.69	138	70	100		85	24
32-14M-55	32	2F	St	142.6	154	70	100		85	24
34-14M-55	34	2F	St	151.52	160	70	100		85	24
36-14M-55	36	2F	St	160.43	168	70	100		85	24
38-14M-55	38	2F	St	169.34	183	70	120		85	24
40-14M-55	40	2F	St	178.25	188	70	120		85	24
44-14M-55	44	2F	St	196.08	211	70	120		85	24
48-14M-55	48	3WF	GG	213.9	226	70	135	170	70	24
56-14M-55	56	3WF	GG	249.55	256	70	135	207	70	28
64-14M-55	64	3WF	GG	285.21	296	70	135	240	70	28
72-14M-55	72	3A	GG	320.86		70	135	278	70	28
80-14M-55	80	3A	GG	356.51		70	135	314	70	28
90-14M-55	90	3A	GG	401.07		70	135	358	70	28
112-14M-55	112	3A	GG	499.11		70	135	456	70	28
144-14M-55	144	3A	GG	641.71		70	135	600	70	28
168-14M-55	168	3A	GG	748.66		70	135	706	70	28
192-14M-55	192	3A	GG	855.62		70	135	813	70	28

ISO 9001:2015 (Certified Company)

MICRO TECH (INDIA) ENGINEERING

WEBSITE:-


E-MAIL:- microtech77@yahoo.com

MOBILE:- +91 9825869626




14M HTD PITCH


85MM BELT WIDTH



TYPE - 2F



TYPE - 3WF



TYPE - 3A

14M Pitch (HTD) Timing pulley										
Suitable Belt Width 85mm										
Pulley Size	No. Of Teeth	Pulley Type		Pitch Dia	Flange Dia	Pulley Width	Hub Dia.		Length	Min. Bore
Size	Teeth	Type	Material	PD	FD	PW	HD	DI	L	B
28-14M-85	28	2F	St	124.78	127	102	100		117	24
30-14M-85	30	2F	St	133.69	138	102	100		117	24
32-14M-85	32	2F	St	142.6	154	102	100		117	24
34-14M-85	34	2F	St	151.52	160	102	100		117	24
36-14M-85	36	2F	St	160.43	168	102	100		117	32
38-14M-85	38	2F	St	169.34	183	102	120		117	32
40-14M-85	40	2F	St	178.25	188	102	135		117	32
44-14M-85	44	2F	St	196.08	211	102	135		117	32
48-14M-85	48	3WF	GG	213.9	226	102	150	170	102	32
56-14M-85	56	3WF	GG	249.55	256	102	150	207	102	32
64-14M-85	64	3WF	GG	285.21	296	102	150	240	102	32
72-14M-85	72	3A	GG	320.86		102	150	278	102	32
80-14M-85	80	3A	GG	356.51		102	150	314	102	32
90-14M-85	90	3A	GG	401.07		102	150	358	102	32
112-14M-85	112	3A	GG	499.11		102	150	456	102	32
144-14M-85	144	3A	GG	641.71		102	150	600	102	32
168-14M-85	168	3A	GG	748.66		102	150	706	102	32
192-14M-85	192	3A	GG	855.62		102	165	813	102	32

ISO 9001:2015 (Certified Company)

MICRO TECH (INDIA) ENGINEERING

WEBSITE:-


E-MAIL:- microtech77@yahoo.com

MOBILE:- +91 9825869626




14M HTD PITCH


115MM BELT WIDTH




TYPE - 2F



TYPE - 2WF



TYPE - 3WF



TYPE - 3A

14M Pitch (HTD) Timing pulley										
Suitable Belt Width 115mm										
Pulley Size	No. Of Teeth	Pulley Type		Pitch Dia	Flange Dia	Pulley Width	Hub Dia.		Length	Min. Bore
Size	Teeth	Type	Material	PD	FD	PW	HD	DI	L	B
28-14M-115	28	2F	St	124.78	127	133	100		148	32
30-14M-115	30	2F	St	133.69	138	133	100		148	32
32-14M-115	32	2F	St	142.6	154	133	100		148	32
34-14M-115	34	2F	St	151.52	160	133	100		148	32
36-14M-115	36	2F	St	160.43	168	133	120		148	32
38-14M-115	38	2WF	St	169.34	183	133	120		148	32
40-14M-115	40	2WF	St	178.25	188	133	135		148	32
44-14M-115	44	2WF	St	196.08	211	133	140		148	32
48-14M-115	48	3WF	GG	213.9	226	133	150	170	133	32
56-14M-115	56	3WF	GG	249.55	256	133	150	207	133	32
64-14M-115	64	3WF	GG	285.21	296	133	150	240	133	32
72-14M-115	72	3A	GG	320.86		133	150	278	133	32
80-14M-115	80	3A	GG	356.51		133	150	314	133	32
90-14M-115	90	3A	GG	401.07		133	150	358	133	32
112-14M-115	112	3A	GG	499.11		133	150	456	133	32
144-14M-115	144	3A	GG	641.71		133	165	600	133	32
168-14M-115	168	3A	GG	748.66		133	165	706	133	32
192-14M-115	192	3A	GG	855.62		133	165	813	133	32

ISO 9001:2015 (Certified Company)

MICRO TECH (INDIA) ENGINEERING

WEBSITE:-


E-MAIL:- microtech77@yahoo.com

MOBILE:- +91 9825869626




14M HTD PITCH


170MM BELT WIDTH

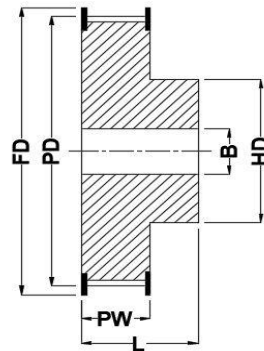


TYPE - 2F



TYPE - 2WF



TYPE - 3W



TYPE - 3A

14M Pitch (HTD) Timing pulley										
Suitable Belt Width 170mm										
Pulley Size	No. Of Teeth	Pulley Type		Pitch Dia	Flange Dia	Pulley Width	Hub Dia.		Length	Min. Bore
Size	Teeth	Type	Material	PD	FD	PW	HD	DI	L	B
28-14M-170	28	2F	St	124.78	127	187	100		202	32
30-14M-170	30	2F	St	133.69	138	187	100		202	32
32-14M-170	32	2F	St	142.60	154	187	100		202	32
34-14M-170	34	2F	St	151.52	160	187	100		202	32
36-14M-170	36	2F	St	160.43	168	187	120		202	32
38-14M-170	38	2WF	St	169.34	183	187	135		202	32
40-14M-170	40	2WF	St	178.25	188	187	140		202	32
44-14M-170	44	2WF	St	196.08	211	187	160		202	32
48-14M-170	48	2WF	St	213.90	226	187	160		202	32
56-14M-170	56	2WF	St	249.55	256	187	160		202	32
64-14M-170	64	2WF	St	285.21	296	187	180		202	32
72-14M-170	72	3W	GG	320.86		187	180	278	187	32
80-14M-170	80	3W	GG	356.51		187	180	314	187	38
90-14M-170	90	3A	GG	401.07		187	180	358	187	38
112-14M-170	122	3A	GG	499.11		187	200	456	187	38
144-14M-170	144	3A	GG	641.71		187	220	600	187	38
168-14M-170	168	3A	GG	748.66		187	220	706	187	38
192-14M-170	192	3A	GG	855.62		187	220	813	187	38

ISO 9001:2015 (Certified Company)

MICRO TECH (INDIA) ENGINEERING

WEBSITE:-


E-MAIL:- microtech77@yahoo.com

MOBILE:- +91 9825869626




AT5 PITCH

10MM BELT WIDTH

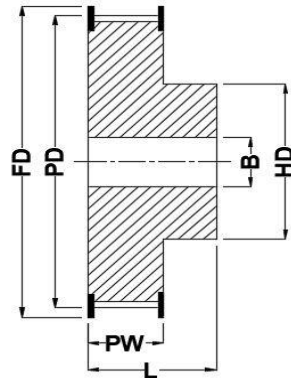

TYPE - 2F

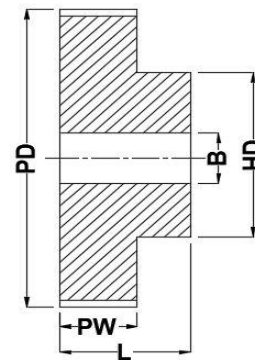

TYPE - 2

AT5 Pitch Timing pulley									
Suitable for Belt Width 10mm									
Pulley size	No.Of Teeth	Pulley Type		Pitch Dia.	Flange Dia.	Pulley Width	Length	Hub Dia.	Min. Bore
Size	Teeth	Type	Material	PD	FD	PW	L	HD	B
21 AT5/12-2	12	2F	Alu	19.01	23	15	21	10	6
21 AT5/14-2	14	2F	Alu	22.29	25	15	21	13	6
21 AT5/15-2	15	2F	Alu	23.88	28	15	21	16	6
21 AT5/16-2	16	2F	Alu	25.47	32	15	21	18	6
21 AT5/18-2	18	2F	Alu	28.65	32	15	21	19	6
21 AT5/19-2	19	2F	Alu	30.25	36	15	21	22	6
21 AT5/20-2	20	2F	Alu	31.83	36	15	21	23	6
21 AT5/22-2	22	2F	Alu	35.12	38	15	21	24	6
21 AT5/24-2	24	2F	Alu	38.21	42	15	21	26	6
21 AT5/25-2	25	2F	Alu	39.80	44	15	21	26	6
21 AT5/26-2	26	2F	Alu	41.47	44	15	21	26	6
21 AT5/27-2	27	2F	Alu	42.98	48	15	21	30	8
21 AT5/28-2	28	2F	Alu	44.62	48	15	21	32	8
21 AT5/30-2	30	2F	Alu	47.76	51	15	21	34	8
21 AT5/32-2	32	2F	Alu	50.94	54	15	21	38	8
21 AT5/36-2	36	2F	Alu	57.31	63	15	21	38	8
21 AT5/40-2	40	2F	Alu	63.66	66	15	21	40	8
21 AT5/42-2	42	2F	Alu	66.87	71	15	21	40	8
21 AT5/44-0	44	2	Alu	70.07		15	21	45	8
21 AT5/48-0	48	2	Alu	76.42		15	21	50	8
21 AT5/60-0	60	2	Alu	95.52		15	21	65	8

ISO 9001:2015 (Certified Company)

MICRO TECH (INDIA) ENGINEERING

WEBSITE:-


E-MAIL:- microtech77@yahoo.com

MOBILE:- +91 9825869626




AT5 PITCH

16MM BELT WIDTH

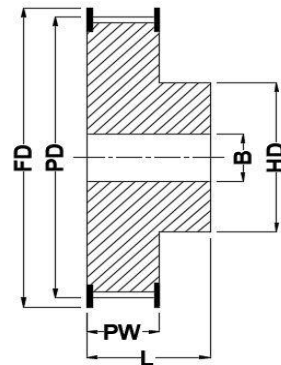

TYPE - 2F

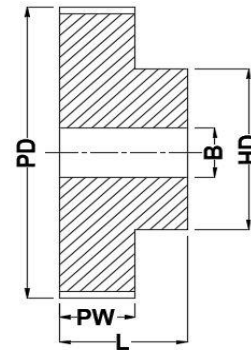

TYPE - 2

AT5 Pitch Timing pulley									
Suitable for Belt Width 16mm									
Pulley size	No.Of Teeth	Pulley Type		Pitch Dia.	Flange Dia.	Pulley Width	Length	Hub Dia.	Min. Bore
Size	Teeth	Type	Material	PD	FD	PW	L	HD	B
27 AT5/12-2	12	2F	Alu	19.01	23	21	27	10	6
27 AT5/14-2	14	2F	Alu	22.29	25	21	27	13	6
27 AT5/15-2	15	2F	Alu	23.88	28	21	27	16	6
27 AT5/16-2	16	2F	Alu	25.47	32	21	27	18	6
27 AT5/18-2	18	2F	Alu	28.65	32	21	27	19	6
27 AT5/19-2	19	2F	Alu	30.25	36	21	27	22	6
27 AT5/20-2	20	2F	Alu	31.83	36	21	27	23	6
27 AT5/22-2	22	2F	Alu	35.12	38	21	27	24	6
27 AT5/24-2	24	2F	Alu	38.21	42	21	27	26	6
27 AT5/25-2	25	2F	Alu	39.80	44	21	27	26	6
27 AT5/26-2	26	2F	Alu	41.47	44	21	27	26	6
27 AT5/27-2	27	2F	Alu	42.98	48	21	27	30	8
27 AT5/28-2	28	2F	Alu	44.62	48	21	27	32	8
27 AT5/30-2	30	2F	Alu	47.76	51	21	27	34	8
27 AT5/32-2	32	2F	Alu	50.94	54	21	27	38	8
27 AT5/36-2	36	2F	Alu	57.31	63	21	27	38	8
27 AT5/40-2	40	2F	Alu	63.66	66	21	27	40	8
27 AT5/42-2	42	2F	Alu	66.87	71	21	27	40	8
27 AT5/44-0	44	2	Alu	70.07		21	27	45	8
27 AT5/48-0	48	2	Alu	76.42		21	27	50	8
27 AT5/60-0	60	2	Alu	95.52		21	27	65	8

ISO 9001:2015 (Certified Company)

MICRO TECH (INDIA) ENGINEERING

WEBSITE:-


E-MAIL:- microtech77@yahoo.com

MOBILE:- +91 9825869626




AT5 PITCH

25MM BELT WIDTH

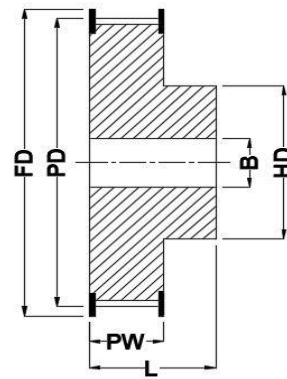

TYPE - 2F

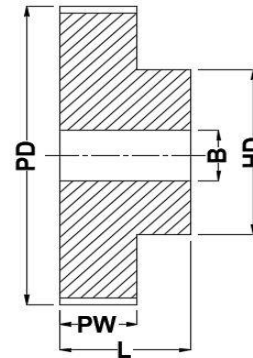

TYPE - 2

AT5 Pitch Timing pulley									
Suitable for Belt Width 25mm									
Pulley size	No.Of Teeth	Pulley Type		Pitch Dia.	Flange Dia.	Pulley Width	Length	Hub Dia.	Min. Bore
Size	Teeth	Type	Material	PD	FD	PW	L	HD	B
36 AT5/12-2	12	2F	Alu	19.01	23	30	36	10	6
36 AT5/14-2	14	2F	Alu	22.29	25	30	36	13	6
36 AT5/15-2	15	2F	Alu	23.88	28	30	36	16	6
36 AT5/16-2	16	2F	Alu	25.47	32	30	36	18	6
36 AT5/18-2	18	2F	Alu	28.65	32	30	36	19	6
36 AT5/19-2	19	2F	Alu	30.25	36	30	36	22	6
36 AT5/20-2	20	2F	Alu	31.83	36	30	36	23	6
36 AT5/22-2	22	2F	Alu	35.12	38	30	36	24	6
36 AT5/24-2	24	2F	Alu	38.21	42	30	36	26	6
36 AT5/25-2	25	2F	Alu	39.80	44	30	36	26	6
36 AT5/26-2	26	2F	Alu	41.47	44	30	36	26	6
36 AT5/27-2	27	2F	Alu	42.98	48	30	36	30	8
36 AT5/28-2	28	2F	Alu	44.62	48	30	36	32	8
36 AT5/30-2	30	2F	Alu	47.76	51	30	36	34	8
36 AT5/32-2	32	2F	Alu	50.94	54	30	36	38	8
36 AT5/36-2	36	2F	Alu	57.31	63	30	36	38	8
36 AT5/40-2	40	2F	Alu	63.66	66	30	36	40	8
36 AT5/42-2	42	2F	Alu	66.87	71	30	36	40	8
36 AT5/44-0	44	2	Alu	70.07		30	36	45	8
36 AT5/48-0	48	2	Alu	76.42		30	36	50	8
36 AT5/60-0	60	2	Alu	95.52		30	36	65	8

ISO 9001:2015 (Certified Company)

MICRO TECH (INDIA) ENGINEERING

WEBSITE:-


E-MAIL:- microtech77@yahoo.com

MOBILE:- +91 9825869626




AT10 PITCH

16MM BELT WIDTH

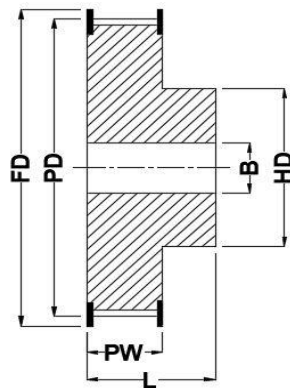

TYPE - 2F

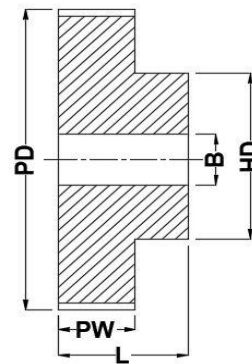

TYPE - 2

AT10 Pitch Timing pulley									
Suitable for Belt Width 16mm									
Pulley size	No.Of Teeth	Pulley Type		Pitch Dia.	Flange Dia.	Pulley Width	Length	Hub Dia.	Min. Bore
Size	Teeth	Type	Material	PD	FD	PW	L	HD	B
31 AT10/15-2	15	2F	Alu	47.75	51	21	31	32	8
31 AT10/16-2	16	2F	Alu	50.93	54	21	31	35	8
31 AT10/18-2	18	2F	Alu	57.29	60	21	31	40	8
31 AT10/19-2	19	2F	Alu	60.48	66	21	31	44	8
31 AT10/20-2	20	2F	Alu	63.66	66	21	31	46	8
31 AT10/22-2	22	2F	Alu	70.03	75	21	31	52	8
31 AT10/24-2	24	2F	Alu	76.39	83	21	31	58	8
31 AT10/25-2	25	2F	Alu	79.58	83	21	31	60	8
31 AT10/26-2	26	2F	Alu	82.76	87	21	31	60	8
31 AT10/27-2	27	2F	Alu	85.95	91	21	31	60	8
31 AT10/28-2	28	2F	Alu	89.13	93	21	31	60	8
31 AT10/30-2	30	2F	Alu	95.49	97	21	31	60	8
31 AT10/32-2	32	2F	Alu	101.86	106	21	31	65	10
31 AT10/36-2	36	2F	Alu	114.59	119	21	31	70	10
31 AT10/40-2	40	2F	Alu	127.32	131	21	31	80	10
31 AT10/44-0	44	2	Alu	140.06		21	31	88	10
31 AT10/48-0	48	2	Alu	152.78		21	31	95	16
31 AT10/60-0	60	2	Alu	190.98		21	31	110	16

ISO 9001:2015 (Certified Company)

MICRO TECH (INDIA) ENGINEERING

WEBSITE:-


E-MAIL:- microtech77@yahoo.com

MOBILE:- +91 9825869626




AT10 PITCH

25MM BELT WIDTH

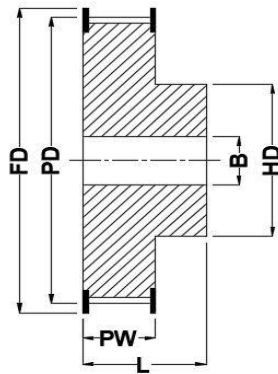

TYPE - 2F

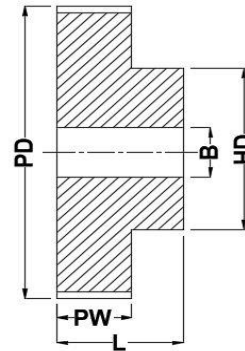

TYPE - 2

AT10 Pitch Timing pulley									
Suitable for Belt Width 25mm									
Pulley size	No.Of Teeth	Pulley Type		Pitch Dia.	Flange Dia.	Pulley Width	Length	Hub Dia.	Min. Bore
Size	Teeth	Type	Material	PD	FD	PW	L	HD	B
40 AT10/15-2	15	2F	Alu	47.75	51	30	40	32	8
40 AT10/16-2	16	2F	Alu	50.93	54	30	40	35	8
40 AT10/18-2	18	2F	Alu	57.29	60	30	40	40	8
40 AT10/19-2	19	2F	Alu	60.48	66	30	40	44	8
40 AT10/20-2	20	2F	Alu	63.66	66	30	40	46	8
40 AT10/22-2	22	2F	Alu	70.03	75	30	40	52	8
40 AT10/24-2	24	2F	Alu	76.39	83	30	40	58	8
40 AT10/25-2	25	2F	Alu	79.58	83	30	40	60	8
40 AT10/26-2	26	2F	Alu	82.76	87	30	40	60	8
40 AT10/27-2	27	2F	Alu	85.95	91	30	40	60	8
40 AT10/28-2	28	2F	Alu	89.13	93	30	40	60	8
40 AT10/30-2	30	2F	Alu	95.49	97	30	40	60	8
40 AT10/32-2	32	2F	Alu	101.86	106	30	40	65	10
40 AT10/36-2	36	2F	Alu	114.59	119	30	40	70	10
40 AT10/40-2	40	2F	Alu	127.32	131	30	40	80	10
40 AT10/44-0	44	2	Alu	140.06		30	40	88	10
40 AT10/48-0	48	2	Alu	152.78		30	40	95	16
40 AT10/60-0	60	2	Alu	190.98		30	40	110	16

ISO 9001:2015 (Certified Company)

MICRO TECH (INDIA) ENGINEERING

WEBSITE:-


E-MAIL:- microtech77@yahoo.com

MOBILE:- +91 9825869626




AT10 PITCH

32MM BELT WIDTH

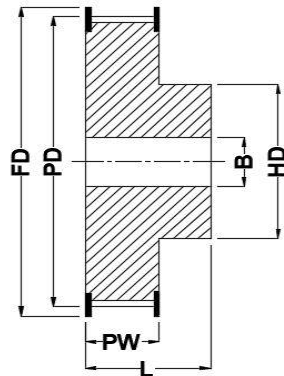

TYPE - 2F

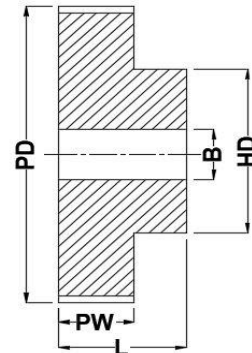

TYPE - 2

AT10 Pitch Timing pulley									
Suitable for Belt Width 32mm									
Pulley size	No.Of Teeth	Pulley Type		Pitch Dia.	Flange Dia.	Pulley Width	Length	Hub Dia.	Min. Bore
Size	Teeth	Type	Material	PD	FD	PW	L	HD	B
47 AT10/18-2	18	2F	Alu	57.29	60	37	47	40	10
47 AT10/19-2	19	2F	Alu	60.48	66	37	47	44	10
47 AT10/20-2	20	2F	Alu	63.66	66	37	47	46	12
47 AT10/22-2	22	2F	Alu	70.03	75	37	47	52	12
47 AT10/24-2	24	2F	Alu	76.39	83	37	47	58	12
47 AT10/25-2	25	2F	Alu	79.58	83	37	47	60	12
47 AT10/26-2	26	2F	Alu	82.76	87	37	47	60	12
47 AT10/27-2	27	2F	Alu	85.95	91	37	47	60	12
47 AT10/28-2	28	2F	Alu	89.13	93	37	47	60	12
47 AT10/30-2	30	2F	Alu	95.49	97	37	47	60	12
47 AT10/32-2	32	2F	Alu	101.86	106	37	47	65	12
47 AT10/36-2	36	2F	Alu	114.59	119	37	47	70	16
47 AT10/40-2	40	2F	Alu	127.32	131	37	47	80	16
47 AT10/44-0	44	2	Alu	140.06		37	47	88	16
47 AT10/48-0	48	2	Alu	152.78		37	47	95	16
47 AT10/60-0	60	2	Alu	190.98		37	47	110	16

ISO 9001:2015 (Certified Company)

MICRO TECH (INDIA) ENGINEERING

WEBSITE:-


E-MAIL:- microtech77@yahoo.com

MOBILE:- +91 9825869626




AT10 PITCH

50MM BELT WIDTH

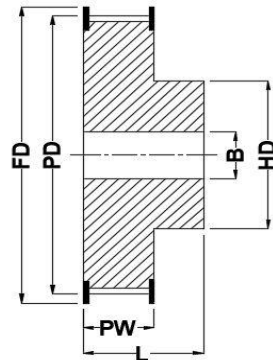

TYPE - 2F



TYPE - 2

AT10 Pitch Timing pulley									
Suitable for Belt Width 50mm									
Pulley size	No.Of Teeth	Pulley Type		Pitch Dia.	Flange Dia.	Pulley Width	Length	Hub Dia.	Min. Bore
Size	Teeth	Type	Material	PD	FD	PW	L	HD	B
66 AT10/18-2	18	2F	Alu	57.29	60	56	66	40	10
66 AT10/19-2	19	2F	Alu	60.48	66	56	66	44	10
66 AT10/20-2	20	2F	Alu	63.66	66	56	66	46	12
66 AT10/22-2	22	2F	Alu	70.03	75	56	66	52	12
66 AT10/24-2	24	2F	Alu	76.39	83	56	66	58	12
66 AT10/25-2	25	2F	Alu	79.58	83	56	66	60	12
66 AT10/26-2	26	2F	Alu	82.76	87	56	66	60	12
66 AT10/27-2	27	2F	Alu	85.95	91	56	66	60	12
66 AT10/28-2	28	2F	Alu	89.13	93	56	66	60	12
66 AT10/30-2	30	2F	Alu	95.49	97	56	66	60	12
66 AT10/32-2	32	2F	Alu	101.86	106	56	66	65	12
66 AT10/36-2	36	2F	Alu	114.59	119	56	66	70	16
66 AT10/40-2	40	2F	Alu	127.32	131	56	66	80	16
66 AT10/44-0	44	2	Alu	140.06		56	66	88	16
66 AT10/48-0	48	2	Alu	152.78		56	66	95	16
66 AT10/60-0	60	2	Alu	190.98		56	66	110	16

ISO 9001:2015 (Certified Company)

MICRO TECH (INDIA) ENGINEERING

WEBSITE:-


E-MAIL:- microtech77@yahoo.com

MOBILE:- +91 9825869626




H PITCH


19MM BELT WIDT

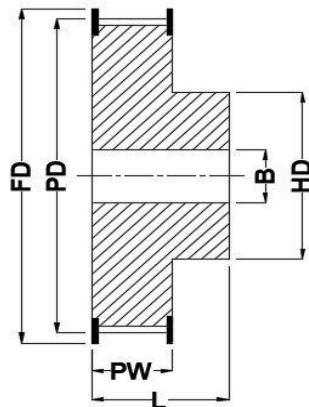

TYPE - 2F

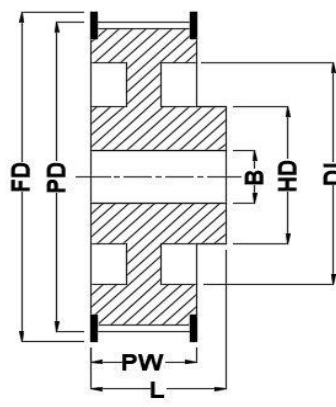

TYPE - 2WF

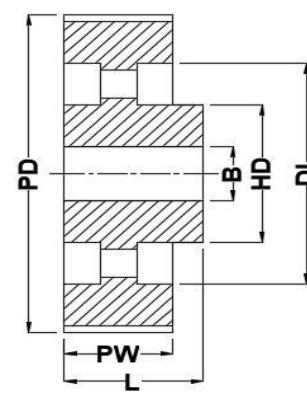

TYPE - 2A

H Pitch Timing pulley - (1/2") 12.7mm										
Suitable for Belt Width H075 (19.00mm)										
Pulley size	No.Of Teeth	Pulley Type		Pitch Dia.	Flange Dia.	Pulley Width	Hub Dia.		Length	Min. Bore
Size	Teeth	Type	Material	PD	FD	PW	HD	DI	L	B
14-H-075	14	2F	St	56.60	64.0	26.4	40		40	10
16-H-075	16	2F	St	64.67	70.0	26.4	46		40	10
18-H-075	18	2F	St	72.77	79.0	26.4	54		40	12
19-H-075	19	2F	St	76.81	82.5	26.4	58		40	12
20-H-075	20	2F	St	80.85	87.0	26.4	62		40	12
21-H-075	21	2F	St	84.89	91.0	26.4	67		40	12
22-H-075	22	2F	St	88.94	94.0	26.4	70		40	12
24-H-075	24	2F	St	97.02	102.0	26.4	75		40	12
26-H-075	26	2F	St	105.11	112.0	26.4	80		40	15
28-H-075	28	2WF	St	113.19	120.0	26.4	80		40	15
30-H-075	30	2WF	St	121.28	128.0	26.4	80		40	15
32-H-075	32	2WF	St	129.36	135.0	26.4	70		40	15
36-H-075	36	2WF	GG	145.53	152.0	26.4	80		40	20
40-H-075	40	2WF	GG	161.70	168.0	26.4	80		40	20
44-H-075	44	2A	GG	177.87	184.0	26.4	80		40	20
48-H-075	48	2A	GG	194.04	200.0	26.4	90		40	20

ISO 9001:2015 (Certified Company)

MICRO TECH (INDIA) ENGINEERING

WEBSITE:-


E-MAIL:- microtech77@yahoo.com

MOBILE:- +91 9825869626



H PITCH

25.4MM BELT WIDTH

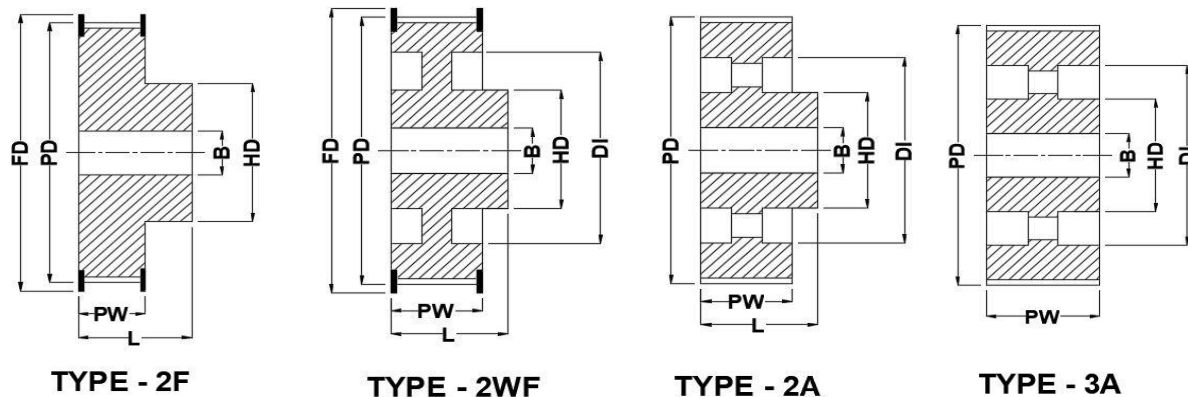

H Pitch Timing pulley - (1/2") 12.7mm										
Suitable for Belt Width H100 (25.4mm)										
Pulley size	No.Of Teeth	Pulley Type		Pitch Dia.	Flange Dia.	Pulley Width	Hub Dia.		Length	Min. Bore
Size	Teeth	Type	Material	PD	FD	PW	HD	DI	L	B
14-H-100	14	2F	St	56.60	63	31	40		41	10
16-H-100	16	2F	St	64.68	71	31	46		41	10
18-H-100	18	2F	St	72.77	79	31	54		41	12
19-H-100	19	2F	St	76.81	83	31	58		41	12
20-H-100	20	2F	St	80.85	87	31	62		41	12
21-H-100	21	2F	St	84.89	91	31	67		41	12
22-H-100	22	2F	St	88.94	93	31	70		41	12
24-H-100	24	2F	St	97.02	103	31	75		41	12
26-H-100	26	2WF	GG	105.11	111	32	55		32	15
28-H-100	28	2WF	GG	113.19	119	32	60		32	15
30-H-100	30	2WF	GG	121.28	127	32	60		32	15
32-H-100	32	2WF	GG	129.36	135	32	70		40	20
36-H-100	36	2WF	GG	145.53	152	32	80		40	20
40-H-100	40	2WF	GG	161.70	168	32	80		40	20
44-H-100	44	2WF	GG	177.87	184	32	80		40	20
48-H-100	48	2WF	GG	194.04	200	32	80		40	20
60-H-100	60	2A	GG	242.55		34	80		45	20
72-H-100	72	2A	GG	291.06		34	80		45	20
84-H-100	84	2A	GG	339.57		34	80		45	20
96-H-100	96	2A	GG	388.08		34	80		45	20
120-H-100	120	3A	GG	485.10		34	90		50	20

ISO 9001:2015 (Certified Company)

MICRO TECH (INDIA) ENGINEERING

WEBSITE:-


E-MAIL:- microtech77@yahoo.com

MOBILE:- +91 9825869626




H PITCH


38MM BELT WIDTH




TYPE - 2F



TYPE - 2WF



TYPE - 2A



TYPE - 3A

H Pitch Timing pulley - (1/2") 12.7mm										
Suitable for Belt Width H150 (38.00mm)										
Pulley size	No.Of Teeth	Pulley Type		Pitch Dia.	Flange Dia.	Pulley Width	Hub Dia.		Length	Min. Bore
Size	Teeth	Type	Material	PD	FD	PW	HD	DI	L	B
14-H-150	14	2F	St	56.60	63	44	40		54	12
16-H-150	16	2F	St	64.68	71	44	46		54	12
18-H-150	18	2F	St	72.77	79	44	54		54	12
19-H-150	19	2F	St	76.81	83	44	58		54	12
20-H-150	20	2F	St	80.85	87	44	62		54	12
21-H-150	21	2F	St	84.89	91	44	67		54	12
22-H-150	22	2F	St	88.94	93	44	70		54	12
24-H-150	24	2F	St	97.02	103	44	75		54	12
26-H-150	26	2WF	GG	105.11	111	45	55		35	15
28-H-150	28	2WF	GG	113.19	119	45	60		35	15
30-H-150	30	2WF	GG	121.28	127	45	60		35	15
32-H-150	32	2WF	GG	129.36	135	45	70		45	20
36-H-150	36	2WF	GG	145.53	152	45	80		45	20
40-H-150	40	2WF	GG	161.70	168	45	80		45	20
44-H-150	44	2WF	GG	177.87	184	45	80		45	20
48-H-150	48	2WF	GG	194.04	200	45	80		45	20
60-H-150	60	2A	GG	242.55		46	85		46	20
72-H-150	72	2A	GG	291.06		46	85		46	20
84-H-150	84	2A	GG	339.57		46	85		46	20
96-H-150	96	2A	GG	388.08		46	85		46	20
120-H-150	120	3A	GG	485.10		46	95		55	24

ISO 9001:2015 (Certified Company)

MICRO TECH (INDIA) ENGINEERING

WEBSITE:-


E-MAIL:- microtech77@yahoo.com

MOBILE:- +91 9825869626




H PITCH


51MM BELT WIDTH




TYPE - 2F



TYPE - 2WF



TYPE - 2A



TYPE - 3A

H Pitch Timing pulley - (1/2") 12.7mm										
Suitable for Belt Width H200 (51.00mm)										
Pulley size	No.Of Teeth	Pulley Type		Pitch Dia.	Flange Dia.	Pulley Width	Hub Dia.		Length	Min. Bore
Size	Teeth	Type	Material	PD	FD	PW	HD	DI	L	B
14-H-200	14	2F	St	56.60	63	58	40		68	12
16-H-200	16	2F	St	64.68	71	58	46		68	15
18-H-200	18	2F	St	72.77	79	58	54		68	15
19-H-200	19	2F	St	76.81	83	58	58		68	15
20-H-200	20	2F	St	80.85	87	58	62		68	15
21-H-200	21	2F	St	84.89	91	58	67		68	15
22-H-200	22	2F	St	88.94	93	58	70		68	15
24-H-200	24	2F	St	97.02	103	58	75		68	15
26-H-200	26	2WF	GG	105.11	111	58	60		42	15
28-H-200	28	2WF	GG	113.19	119	58	60		42	15
30-H-200	30	2WF	GG	121.28	127	58	70		42	15
32-H-200	32	2WF	GG	129.36	135	58	70		47	20
36-H-200	36	2WF	GG	145.53	152	58	80		47	20
40-H-200	40	2WF	GG	161.70	168	58	80		45	20
44-H-200	44	2WF	GG	177.87	184	58	80		45	20
48-H-200	48	2WF	GG	194.04	200	58	85		45	20
60-H-200	60	2A	GG	242.55		60	90		50	20
72-H-200	72	2A	GG	291.06		60	90		50	20
84-H-200	84	2A	GG	339.57		60	90		50	20
96-H-200	96	2A	GG	388.08		60	90		50	20
120-H-200	120	3A	GG	485.10		60	100		60	24

ISO 9001:2015 (Certified Company)

MICRO TECH (INDIA) ENGINEERING

WEBSITE:-


E-MAIL:- microtech77@yahoo.com

MOBILE:- +91 9825869626




H PITCH


76MM BELT WIDTH




TYPE - 2F



TYPE - 2WF



TYPE - 2A



TYPE - 3A

H Pitch Timing pulley - (1/2") 12.7mm										
Suitable for Belt Width H300 (76.00mm)										
Pulley size	No.Of Teeth	Pulley Type		Pitch Dia.	Flange Dia.	Pulley Width	Hub Dia.		Length	Min. Bore
Size	Teeth	Type	Material	PD	FD	PW	HD	DI	L	B
16-H-300	16	2F	St	64.68	71	84	46		94	18
18-H-300	18	2F	St	72.77	79	84	54		94	18
19-H-300	19	2F	St	76.81	83	84	58		94	18
20-H-300	20	2F	St	80.85	87	84	62		94	18
21-H-300	21	2F	St	84.89	91	84	67		94	18
22-H-300	22	2F	St	88.94	93	84	70		94	18
24-H-300	24	2F	St	97.02	103	84	75		94	18
26-H-300	26	2WF	GG	105.11	111	84	60		57	18
28-H-300	28	2WF	GG	113.19	119	84	60		57	18
30-H-300	30	2WF	GG	121.28	127	84	70		57	18
32-H-300	32	2WF	GG	129.36	135	84	70		57	18
36-H-300	36	2WF	GG	145.53	152	84	80		57	18
40-H-300	40	2WF	GG	161.70	168	84	80		55	18
44-H-300	44	2WF	GG	177.87	184	84	80		55	24
48-H-300	48	2WF	GG	194.04	200	84	85		55	24
60-H-300	60	2A	GG	242.55		86	100		55	24
72-H-300	72	2A	GG	291.06		86	100		55	28
84-H-300	84	3A	GG	339.57		86	100		55	28
96-H-300	96	3A	GG	388.08		86	100		55	28
120-H-300	120	3A	GG	485.10		86	110		65	28

ISO 9001:2015 (Certified Company)

MICRO TECH (INDIA) ENGINEERING

WEBSITE:-


E-MAIL:- microtech77@yahoo.com

MOBILE:- +91 9825869626




L PITCH

12.7MM BELT WIDT

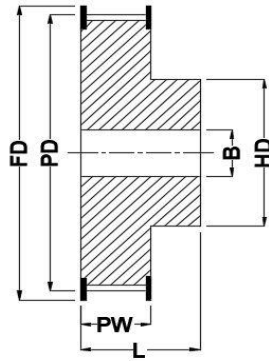

TYPE - 2F



TYPE - 2A

L Pitch Timing pulley - (3/8") 9.52mm										
Suitable for Belt Width L050 (12.7mm)										
Pulley size	No.Of Teeth	Pulley Type		Pitch Dia.	Flange Dia.	Pulley Width	Hub Dia.		Length	Min. Bore
Size	Teeth	Type	Material	PD	FD	PW	HD	DI	L	B
10-L-050	10	2F	St	30.32	36	19	22		28	6
12-L-050	12	2F	St	36.38	42	19	28		28	6
13-L-050	13	2F	St	39.41	44	19	30		28	6
14-L-050	14	2F	St	42.45	48	19	33		28	8
15-L-050	15	2F	St	45.48	51	19	36		28	8
16-L-050	16	2F	St	48.51	54	19	38		28	8
17-L-050	17	2F	St	51.54	57	19	40		30	10
18-L-050	18	2F	St	54.57	60	19	40		30	10
19-L-050	19	2F	St	57.61	62	19	40		30	10
20-L-050	20	2F	St	60.64	66	19	46		30	10
21-L-050	21	2F	St	63.67	71	19	46		30	10
22-L-050	22	2F	St	66.70	75	19	50		30	10
24-L-050	24	2F	St	72.77	79	19	50		32	12
26-L-050	26	2F	St	78.83	87	19	50		32	12
28-L-050	28	2F	St	84.89	91	19	50		32	12
30-L-050	30	2F	St	90.96	97	19	50		32	12
32-L-050	32	2F	St	97.02	103	19	50		32	12
36-L-050	36	2F	St	109.15	115	19	60		35	12
40-L-050	40	2F	St	121.28	127	19	60		35	12
44-L-050	44	2F	St	133.40	140	19	60		35	12
48-L-050	48	2F	St	145.53	152	19	60		35	12
60-L-050	60	2A	GG	181.91		19	70	160	35	15
72-L-050	72	2A	GG	218.30		19	70	197	35	15
84-L-050	84	2A	GG	254.68		19	70	233	35	15

ISO 9001:2015 (Certified Company)

MICRO TECH (INDIA) ENGINEERING

WEBSITE:-


E-MAIL:- microtech77@yahoo.com

MOBILE:- +91 9825869626




L PITCH

19MM BELT WIDTH



TYPE - 2F



TYPE - 2A

L Pitch Timing pulley - (3/8") 9.52mm										
Suitable for Belt Width L075 (19.05mm)										
Pulley size	No.Of Teeth	Pulley Type		Pitch Dia.	Flange Dia.	Pulley Width	Hub Dia.		Length	Min. Bore
Size	Teeth	Type	Material	PD	FD	PW	HD	DI	L	B
10-L-075	10	2F	St	30.32	36	25	22		35	6
12-L-075	12	2F	St	36.38	42	25	28		35	8
13-L-075	13	2F	St	39.41	44	25	30		35	8
14-L-075	14	2F	St	42.45	48	25	33		35	8
15-L-075	15	2F	St	45.48	51	25	36		35	8
16-L-075	16	2F	St	48.51	54	25	38		35	8
17-L-075	17	2F	St	51.54	57	25	40		35	10
18-L-075	18	2F	St	54.57	60	25	40		35	10
19-L-075	19	2F	St	57.61	60	25	40		35	10
20-L-075	20	2F	St	60.64	66	25	46		35	10
21-L-075	21	2F	St	63.67	71	25	46		38	10
22-L-075	22	2F	St	66.70	75	25	50		38	10
24-L-075	24	2F	St	72.77	79	25	50		38	12
26-L-075	26	2F	St	78.83	87	25	50		38	12
28-L-075	28	2F	St	84.89	91	25	50		38	12
30-L-075	30	2F	St	90.96	97	25	50		38	12
32-L-075	32	2F	St	97.02	103	25	50		38	12
36-L-075	36	2F	St	109.15	115	25	60		38	12
40-L-075	40	2F	St	121.28	127	25	60		38	12
44-L-075	44	2F	St	133.40	140	25	60		38	12
48-L-075	48	2F	St	145.53	152	25	60		38	12
60-L-075	60	2A	GG	181.91		26	70	160	45	15
72-L-075	72	2A	GG	218.30		26	70	197	45	15
84-L-075	84	2A	GG	254.68		26	70	233	45	15

ISO 9001:2015 (Certified Company)

MICRO TECH (INDIA) ENGINEERING

WEBSITE:-


E-MAIL:- microtech77@yahoo.com

MOBILE:- +91 9825869626




L PITCH

25.4MM BELT WIDTH

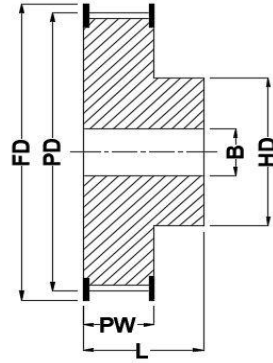

TYPE - 2F

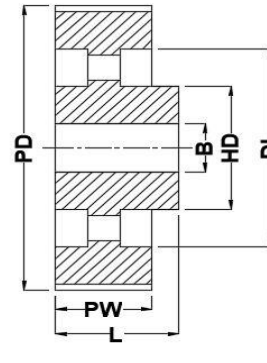

TYPE - 2A

L Pitch Timing pulley - (3/8") 9.52mm										
Suitable for Belt Width L100 (25.4mm)										
Pulley size	No.Of Teeth	Pulley Type		Pitch Dia.	Flange Dia.	Pulley Width	Hub Dia.		Length	Min. Bore
Size	Teeth	Type	Material	PD	FD	PW	HD	DI	L	B
10-L-100	10	2F	St	30.32	36	32	22		42	6
12-L-100	12	2F	St	36.38	42	32	28		42	8
13-L-100	13	2F	St	39.41	44	32	30		42	8
14-L-100	14	2F	St	42.45	48	32	33		42	8
15-L-100	15	2F	St	45.48	51	32	36		42	8
16-L-100	16	2F	St	48.51	54	32	38		42	8
17-L-100	17	2F	St	51.54	57	32	40		45	10
18-L-100	18	2F	St	54.57	60	32	40		45	10
19-L-100	19	2F	St	57.61	60	32	40		45	10
20-L-100	20	2F	St	60.64	66	32	46		45	10
21-L-100	21	2F	St	63.67	71	32	46		45	10
22-L-100	22	2F	St	66.70	75	32	50		45	10
24-L-100	24	2F	St	72.77	79	32	50		45	12
26-L-100	26	2F	St	78.83	87	32	50		45	12
28-L-100	28	2F	St	84.89	91	32	50		45	12
30-L-100	30	2F	St	90.96	97	32	50		45	12
32-L-100	32	2F	St	97.02	103	32	50		45	12
36-L-100	36	2F	GG	109.15	115	32	60		45	12
40-L-100	40	2F	GG	121.28	127	32	60		45	12
44-L-100	44	2F	GG	133.40	140	32	60		45	12
48-L-100	48	2F	GG	145.53	152	32	60		45	12
60-L-100	60	2A	GG	181.91		32	70	160	48	15
72-L-100	72	2A	GG	218.30		32	70	197	48	15
84-L-100	84	2A	GG	254.68		32	70	233	48	15

ISO 9001:2015 (Certified Company)

MICRO TECH (INDIA) ENGINEERING

WEBSITE:-


E-MAIL:- microtech77@yahoo.com

MOBILE:- +91 9825869626




MXL PITCH

6MM BELT WIDTH

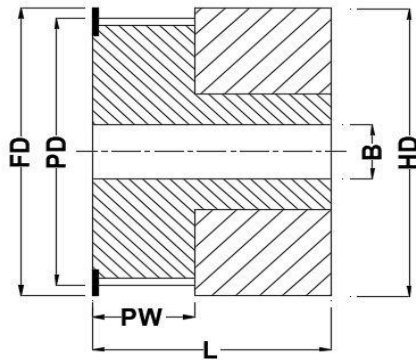

TYPE - 0F

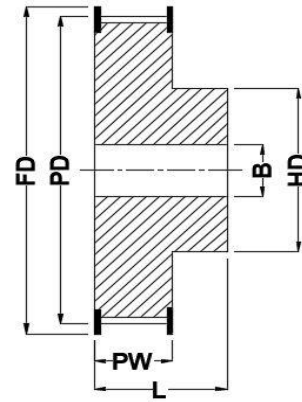

TYPE - 2F

MXL Pitch Timing pulley - (080") 2.03MM

Suitable for Belt Width 06mm

Pulley Size	No. Of Teeth	Pulley Type		Pitch Dia	Flange Dia	Pulley Width	Hub Dia.	Length	Min. Bore
Size	Teeth	Type	Material	PD	FD	PW	HD	L	B
16-MXL-025	16	0F	Alu	10.35	15	8.5	15	16	4
18-MXL-025	18	0F	Alu	11.64	16	8.5	16	16	4
20-MXL-025	20	0F	Alu	12.94	16	8.5	16	16	4
22-MXL-025	22	0F	Alu	14.23	18	8.5	18	16	4
24-MXL-025	24	0F	Alu	15.52	18	8.5	20	16	5
28-MXL-025	28	2F	Alu	18.11	23	11	11	16	5
30-MXL-025	30	2F	Alu	19.40	23	11	12	16	5
32-MXL-025	32	2F	Alu	20.70	25	11	14	16	5
36-MXL-025	36	2F	Alu	23.29	28	11	16	16	5
40-MXL-025	40	2F	Alu	25.87	32	11	18	16	5
42-MXL-025	42	2F	Alu	27.17	32	11	18	16	6
44-MXL-025	44	2F	Alu	28.46	36	11	18	16	6
48-MXL-025	48	2F	Alu	31.05	36	11	20	16	6
60-MXL-025	60	2F	Alu	38.81	44	11	24	16	6
72-MXL-025	72	2F	Alu	46.57	52	11	32	16	6

ISO 9001:2015 (Certified Company)

MICRO TECH (INDIA) ENGINEERING

WEBSITE:-


E-MAIL:- microtech77@yahoo.com

MOBILE:- +91 9825869626




T2.5 PITCH


4-6MM BELT WIDTH

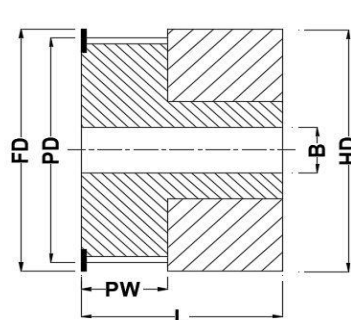

TYPE - 0F



TYPE - 2F



TYPE - 2

T2.5 Pitch Timing pulley									
Suitable for Belt Width 4mm, 6mm									
Pulley size	No.Of Teeth	Pulley Type		Pitch Dia.	Flange Dia.	Pulley Width	Hub Dia.	Length	Min. Bore
Size	Teeth	Type	Material	PD	FD	PW	HD	L	B
16T2.5/12-2	12	0F	Alu	9.55	13.0	9	12	16	4
16T2.5/14-2	14	0F	Alu	11.14	15.0	9	14	16	4
16T2.5/15-2	15	0F	Alu	11.94	15.0	9	15	16	4
16T2.5/16-2	16	0F	Alu	12.73	16.0	9	16	16	5
16T2.5/18-2	18	2F	Alu	14.32	17.5	10	9.5	16	5
16T2.5/19-2	19	2F	Alu	15.12	18.0	10	9.5	16	5
16T2.5/20-2	20	2F	Alu	15.92	19.5	10	10	16	5
16T2.5/22-2	22	2F	Alu	17.51	23.0	10	10	16	5
16 T2.5/24-2	24	2F	Alu	19.10	23.0	10	12	16	5
16 T2.5/25-2	25	2F	Alu	19.90	23.0	10	12	16	5
16 T2.5/26-2	26	2F	Alu	20.70	25.0	10	13	16	5
16 T2.5/28-2	28	2F	Alu	22.28	25.0	10	13	16	5
16 T2.5/30-2	30	2F	Alu	23.87	28.0	10	16	16	6
16 T2.5/32-2	32	2F	Alu	25.47	32.0	10	16	16	6
16 T2.5/36-2	36	2F	Alu	28.65	36.0	10	20	16	6
16 T2.5/40-2	40	2F	Alu	31.83	38.0	10	20	16	6
16 T2.5/44-2	44	2F	Alu	35.02	42.0	10	24	16	6
16 T2.5/48-0	48	2	Alu	38.20		10	26	16	8
16 T2.5/60-0	60	2	Alu	47.75		10	34	16	8

ISO 9001:2015 (Certified Company)

MICRO TECH (INDIA) ENGINEERING

WEBSITE:-


E-MAIL:- microtech77@yahoo.com

MOBILE:- +91 9825869626




T5 PITCH

10MM BELT WIDTH

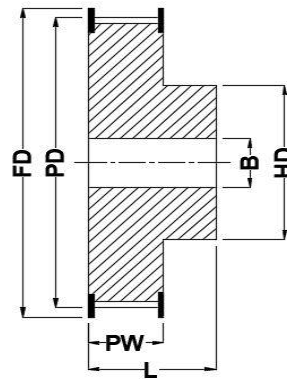

TYPE - 2F

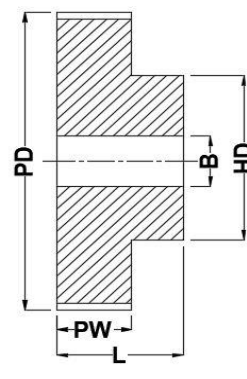

TYPE - 2

T5 Pitch Timing pulley									
Suitable for Belt Width 10mm									
Pulley size	No.Of Teeth	Pulley Type		Pitch Dia.	Flange Dia.	Pulley Width	Hub Dia.	Length	Min. Bore
Size	Teeth	Type	Material	PD	FD	PW	HD	L	B
21 T5/10-2	10	2F	Alu	15.92	19.5	15	8	21	5
21 T5/12-2	12	2F	Alu	19.01	23.0	15	10	21	5
21 T5/14-2	14	2F	Alu	22.29	25.0	15	13	21	5
21 T5/15-2	15	2F	Alu	23.88	28.0	15	16	21	6
21 T5/16-2	16	2F	Alu	25.47	32.0	15	18	21	6
21 T5/18-2	18	2F	Alu	28.65	32.0	15	19	21	6
21 T5/19-2	19	2F	Alu	30.25	36.0	15	22	21	6
21 T5/20-2	20	2F	Alu	31.83	36.0	15	23	21	6
21 T5/22-2	22	2F	Alu	35.12	38.0	15	24	21	6
21 T5/24-2	24	2F	Alu	38.21	42.0	15	26	21	6
21 T5/25-2	25	2F	Alu	39.8	44.0	15	26	21	6
21 T5/26-2	26	2F	Alu	41.47	44.0	15	26	21	6
21 T5/27-2	27	2F	Alu	42.98	48.0	15	30	21	8
21 T5/28-2	28	2F	Alu	44.62	48.0	15	32	21	8
21 T5/30-2	30	2F	Alu	47.76	51.0	15	34	21	8
21 T5/32-2	32	2F	Alu	50.94	54.0	15	38	21	8
21 T5/36-2	36	2F	Alu	57.31	63.0	15	38	21	8
21 T5/40-2	40	2F	Alu	63.66	66.0	15	40	21	8
21 T5/42-2	42	2F	Alu	66.87	71.0	15	40	21	8
21 T5/44-2	44	2	Alu	70.07		15	45	21	8
21 T5/48-0	48	2	Alu	76.42		15	50	21	8
21 T5/60-0	60	2	Alu	95.52		15	65	21	8

ISO 9001:2015 (Certified Company)

MICRO TECH (INDIA) ENGINEERING

WEBSITE:-


E-MAIL:- microtech77@yahoo.com

MOBILE:- +91 9825869626




T5 PITCH

16MM BELT WIDTH

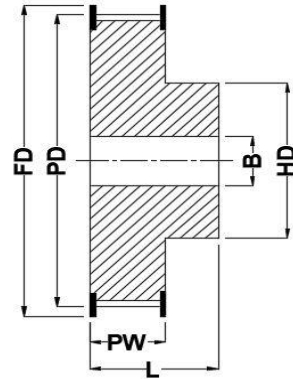

TYPE - 2F

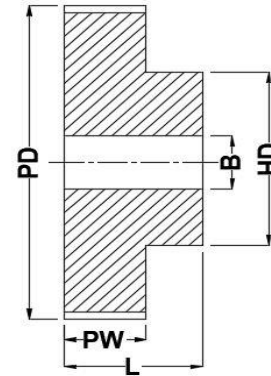

TYPE - 2

T5 Pitch Timing pulley									
Suitable for Belt Width 16mm									
Pulley size	No.Of Teeth	Pulley Type		Pitch Dia.	Flange Dia.	Pulley Width	Hub Dia.	Length	Min. Bore
Size	Teeth	Type	Material	PD	FD	PW	HD	L	B
27 T5/10-2	10	2F	Alu	15.92	19.5	21	8	27	5
27 T5/12-2	12	2F	Alu	19.01	23.0	21	10	27	5
27 T5/14-2	14	2F	Alu	22.29	25.0	21	13	27	5
27 T5/15-2	15	2F	Alu	23.88	28.0	21	16	27	6
27 T5/16-2	16	2F	Alu	25.47	32.0	21	18	27	6
27 T5/18-2	18	2F	Alu	28.65	32.0	21	19	27	6
27 T5/19-2	19	2F	Alu	30.25	36.0	21	22	27	6
27 T5/20-2	20	2F	Alu	31.83	36.0	21	23	27	6
27 T5/22-2	22	2F	Alu	35.12	38.0	21	24	27	6
27 T5/24-2	24	2F	Alu	38.21	42.0	21	26	27	6
27 T5/25-2	25	2F	Alu	39.8	44.0	21	26	27	6
27 T5/26-2	26	2F	Alu	41.47	44.0	21	26	27	6
27 T5/27-2	27	2F	Alu	42.98	48.0	21	30	27	8
27 T5/28-2	28	2F	Alu	44.62	48.0	21	32	27	8
27 T5/30-2	30	2F	Alu	47.76	51.0	21	34	27	8
27 T5/32-2	32	2F	Alu	50.94	54.0	21	38	27	8
27 T5/36-2	36	2F	Alu	57.31	63.0	21	38	27	8
27 T5/40-2	40	2F	Alu	63.66	66.0	21	40	27	8
27 T5/42-2	42	2F	Alu	66.87	71.0	21	40	27	8
27 T5/44-0	44	2	Alu	70.07		21	45	27	8
27 T5/48-0	48	2	Alu	76.42		21	50	27	8
27 T5/60-0	60	2	Alu	95.52		21	65	27	8

ISO 9001:2015 (Certified Company)

MICRO TECH (INDIA) ENGINEERING

WEBSITE:-


E-MAIL:- microtech77@yahoo.com

MOBILE:- +91 9825869626




T5 PITCH

25MM BELT WIDTH

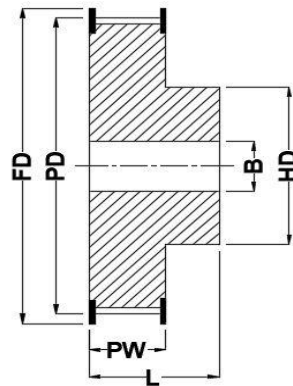

TYPE - 2F

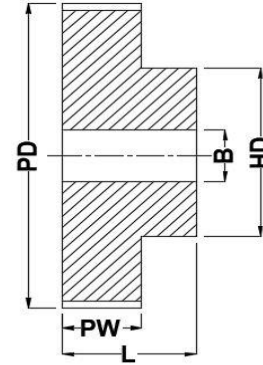

TYPE - 2

T5 Pitch Timing pulley									
Suitable for Belt Width 25mm									
Pulley size	No.Of Teeth	Pulley Type		Pitch Dia.	Flange Dia.	Pulley Width	Hub Dia.	Length	Min. Bore
Size	Teeth	Type	Material	PD	FD	PW	HD	L	B
36 T5/10-2	10	2F	Alu	15.92	19.5	30	8	36	5
36 T5/12-2	12	2F	Alu	19.01	23.0	30	10	36	5
36 T5/14-2	14	2F	Alu	22.29	25.0	30	13	36	5
36 T5/15-2	15	2F	Alu	23.88	28.0	30	16	36	6
36 T5/16-2	16	2F	Alu	25.47	32.0	30	18	36	6
36 T5/18-2	18	2F	Alu	28.65	32.0	30	19	36	6
36 T5/19-2	19	2F	Alu	30.25	36.0	30	22	36	6
36 T5/20-2	20	2F	Alu	31.83	36.0	30	23	36	6
36 T5/22-2	22	2F	Alu	35.12	38.0	30	24	36	6
36 T5/24-2	24	2F	Alu	38.21	42.0	30	26	36	8
36 T5/25-2	25	2F	Alu	39.8	44.0	30	26	36	8
36 T5/26-2	26	2F	Alu	41.47	44.0	30	26	36	8
36 T5/27-2	27	2F	Alu	42.98	48.0	30	30	36	8
36 T5/28-2	28	2F	Alu	44.62	48.0	30	32	36	8
36 T5/30-2	30	2F	Alu	47.76	51.0	30	34	36	8
36 T5/32-2	32	2F	Alu	50.94	54.0	30	38	36	8
36 T5/36-2	36	2F	Alu	57.31	63.0	30	38	36	8
36 T5/40-2	40	2F	Alu	63.66	66.0	30	40	36	8
36 T5/42-2	42	2F	Alu	66.87	71.0	30	40	36	8
36 T5/44-0	44	2	Alu	70.07		30	45	36	8
36 T5/48-0	48	2	Alu	76.42		30	50	36	8
36 T5/60-0	60	2	Alu	95.52		30	65	36	8

ISO 9001:2015 (Certified Company)

MICRO TECH (INDIA) ENGINEERING

WEBSITE:-


E-MAIL:- microtech77@yahoo.com

MOBILE:- +91 9825869626




T10 PITCH

16MM BELT WIDTH

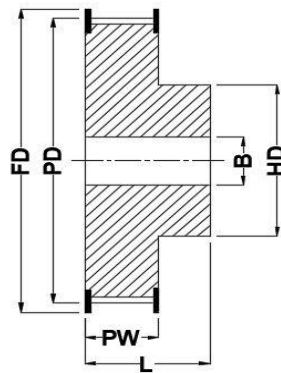

TYPE - 2F

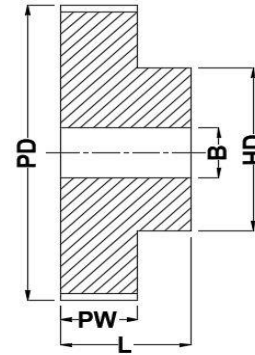

TYPE - 2

T10 Pitch Timing pulley									
Suitable for Belt Width 16mm									
Pulley size	No.Of Teeth	Pulley Type		Pitch Dia.	Flange Dia.	Pulley Width	Length	Hub Dia.	Min. Bore
Size	Teeth	Type	Material	PD	FD	PW	L	HD	B
31 T10/12-2	12	2F	Alu	38.20	42	21	31	28	6
31 T10/14-2	14	2F	Alu	44.56	48	21	31	32	8
31 T10/15-2	15	2F	Alu	47.75	51	21	31	32	8
31 T10/16-2	16	2F	Alu	50.93	54	21	31	35	8
31 T10/18-2	18	2F	Alu	57.29	60	21	31	40	8
31 T10/19-2	19	2F	Alu	60.48	66	21	31	44	8
31 T10/20-2	20	2F	Alu	63.66	66	21	31	46	8
31 T10/22-2	22	2F	Alu	70.03	75	21	31	52	8
31 T10/24-2	24	2F	Alu	76.39	83	21	31	58	8
31 T10/25-2	25	2F	Alu	79.58	83	21	31	60	8
31 T10/26-2	26	2F	Alu	82.76	87	21	31	60	8
31 T10/27-2	27	2F	Alu	85.95	91	21	31	60	8
31 T10/28-2	28	2F	Alu	89.13	93	21	31	60	8
31 T10/30-2	30	2F	Alu	95.49	97	21	31	60	8
31 T10/32-2	32	2F	Alu	101.86	106	21	31	65	10
31 T10/36-2	36	2F	Alu	114.59	119	21	31	70	10
31 T10/40-2	40	2F	Alu	127.32	131	21	31	80	10
31 T10/44-0	44	2	Alu	140.06		21	31	88	10
31 T10/48-0	48	2	Alu	152.78		21	31	95	16
31 T10/60-0	60	2	Alu	190.98		21	31	110	16

ISO 9001:2015 (Certified Company)

MICRO TECH (INDIA) ENGINEERING

WEBSITE:-


E-MAIL:- microtech77@yahoo.com

MOBILE:- +91 9825869626




T10 PITCH

25MM BELT WIDTH

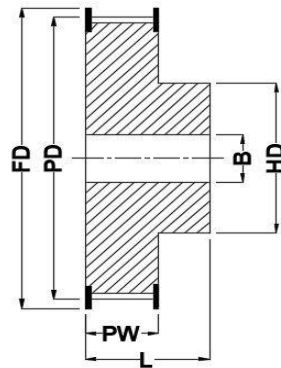

TYPE - 2F

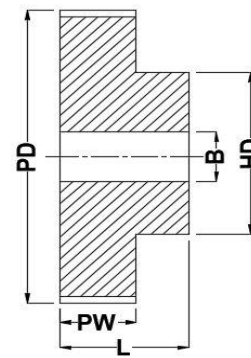

TYPE - 2

T10 Pitch Timing pulley									
Suitable for Belt Width 25mm									
Pulley size	No.Of Teeth	Pulley Type		Pitch Dia.	Flange Dia.	Pulley Width	Length	Hub Dia.	Min. Bore
Size	Teeth	Type	Material	PD	FD	PW	L	HD	B
40 T10/12-2	12	2F	Alu	38.20	42	30	40	28	6
40 T10/14-2	14	2F	Alu	44.56	48	30	40	32	8
40 T10/15-2	15	2F	Alu	47.75	51	30	40	32	8
40 T10/16-2	16	2F	Alu	50.93	54	30	40	35	8
40 T10/18-2	18	2F	Alu	57.29	60	30	40	40	8
40 T10/19-2	19	2F	Alu	60.48	66	30	40	44	8
40 T10/20-2	20	2F	Alu	63.66	66	30	40	46	8
40 T10/22-2	22	2F	Alu	70.03	75	30	40	52	8
40 T10/24-2	24	2F	Alu	76.39	83	30	40	58	8
40 T10/25-2	25	2F	Alu	79.58	83	30	40	60	8
40 T10/26-2	26	2F	Alu	82.76	87	30	40	60	8
40 T10/27-2	27	2F	Alu	85.95	91	30	40	60	8
40 T10/28-2	28	2F	Alu	89.13	93	30	40	60	8
40 T10/30-2	30	2F	Alu	95.49	97	30	40	60	8
40 T10/32-2	32	2F	Alu	101.86	106	30	40	65	10
40 T10/36-2	36	2F	Alu	114.59	119	30	40	70	10
40 T10/40-2	40	2F	Alu	127.32	131	30	40	80	10
40 T10/44-0	44	2	Alu	140.06		30	40	88	10
40 T10/48-0	48	2	Alu	152.78		30	40	95	16
40 T10/60-0	60	2	Alu	190.98		30	40	110	16

ISO 9001:2015 (Certified Company)

MICRO TECH (INDIA) ENGINEERING

WEBSITE:-


E-MAIL:- microtech77@yahoo.com

MOBILE:- +91 9825869626




T10 PITCH

32MM BELT WIDTH

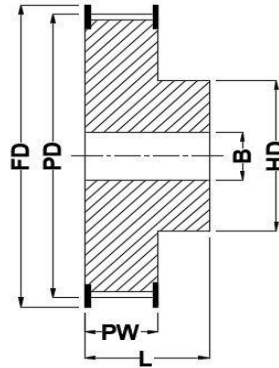

TYPE - 2F

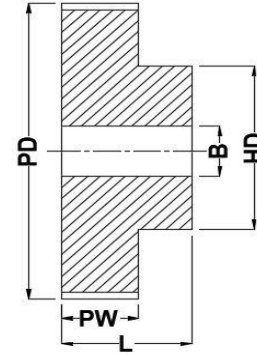

TYPE - 2

T10 Pitch Timing pulley									
Suitable for Belt Width 32mm									
Pulley size	No.Of Teeth	Pulley Type		Pitch Dia.	Flange Dia.	Pulley Width	Length	Hub Dia.	Min. Bore
Size	Teeth	Type	Material	PD	FD	PW	L	HD	B
47 T10/18-2	18	2F	Alu	57.29	60	37	47	40	10
47 T10/19-2	19	2F	Alu	60.48	66	37	47	44	10
47 T10/20-2	20	2F	Alu	63.66	66	37	47	46	12
47 T10/22-2	22	2F	Alu	70.03	75	37	47	52	12
47 T10/24-2	24	2F	Alu	76.39	83	37	47	58	12
47 T10/25-2	25	2F	Alu	79.58	83	37	47	60	12
47 T10/26-2	26	2F	Alu	82.76	87	37	47	60	12
47 T10/27-2	27	2F	Alu	85.95	91	37	47	60	12
47 T10/28-2	28	2F	Alu	89.13	93	37	47	60	12
47 T10/30-2	30	2F	Alu	95.49	97	37	47	60	12
47 T10/32-2	32	2F	Alu	101.86	106	37	47	65	12
47 T10/36-2	36	2F	Alu	114.59	119	37	47	70	16
47 T10/40-2	40	2F	Alu	127.32	131	37	47	80	16
47 T10/44-0	44	2	Alu	140.06		37	47	88	16
47 T10/48-0	48	2	Alu	152.78		37	47	95	16
47 T10/60-0	60	2	Alu	190.98		37	47	110	16

ISO 9001:2015 (Certified Company)

MICRO TECH (INDIA) ENGINEERING

WEBSITE:-


E-MAIL:- microtech77@yahoo.com

MOBILE:- +91 9825869626




T10 PITCH

50MM BELT WIDTH

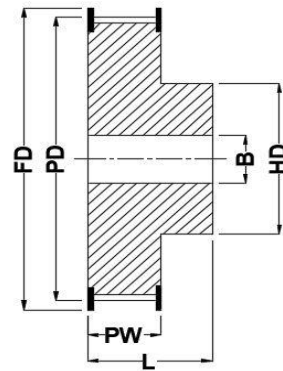

TYPE - 2F



TYPE - 2

T10 Pitch Timing pulley									
Suitable for Belt Width 50mm									
Pulley size	No.Of Teeth	Pulley Type		Pitch Dia.	Flange Dia.	Pulley Width	Length	Hub Dia.	Min. Bore
Size	Teeth	Type	Material	PD	FD	PW	L	HD	B
66 T10/18-2	18	2F	Alu	57.29	60	56	66	40	10
66 T10/19-2	19	2F	Alu	60.48	66	56	66	44	10
66 T10/20-2	20	2F	Alu	63.66	66	56	66	46	12
66 T10/22-2	22	2F	Alu	70.03	75	56	66	52	12
66 T10/24-2	24	2F	Alu	76.39	83	56	66	58	12
66 T10/25-2	25	2F	Alu	79.58	83	56	66	60	12
66 T10/26-2	26	2F	Alu	82.76	87	56	66	60	12
66 T10/27-2	27	2F	Alu	85.95	91	56	66	60	12
66 T10/28-2	28	2F	Alu	89.13	93	56	66	60	12
66 T10/30-2	30	2F	Alu	95.49	97	56	66	60	12
66 T10/32-2	32	2F	Alu	101.86	106	56	66	65	12
66 T10/36-2	36	2F	Alu	114.59	119	56	66	70	16
66 T10/40-2	40	2F	Alu	127.32	131	56	66	80	16
66 T10/44-0	44	2	Alu	140.06		56	66	88	16
66 T10/48-0	48	2	Alu	152.78		56	66	95	16
66 T10/60-0	60	2	Alu	190.98		56	66	110	16

ISO 9001:2015 (Certified Company)

MICRO TECH (INDIA) ENGINEERING

WEBSITE:-


E-MAIL:- microtech77@yahoo.com

MOBILE:- +91 9825869626




XH PITCH


50.8MM BELT WIDT



TYPE - 2F



TYPE - 2WF



TYPE - 3A

XH Pitch Timing pulley - (7/8") 22.22mm										
Suitable for Belt Width XH200 (50.8mm)										
Pulley size	No.Of Teeth	Pulley Type		Pitch Dia.	Flange Dia.	Pulley Width	Hub Dia.		Length	Min. Bore
Size	Teeth	Type	Material	PD	FD	PW	HD	ID	L	B
18-XH-200	18	2F	St	127.34	142	65	85		80	24
20-XH-200	20	2F	St	141.49	155	65	95		80	24
22-XH-200	22	2F	St	155.64	170	65	110		80	24
24-XH-200	24	2F	St	169.79	184	65	125		80	24
26-XH-200	26	2F	St	183.94	198	65	140		80	24
28-XH-200	28	2F	St	198.08	212	65	120		80	24
30-XH-200	30	2WF	GG	212.23	227	65	120		85	24
32-XH-200	32	2WF	GG	226.38	240	65	130		85	24
40-XH-200	40	2WF	GG	282.98	297	65	140		85	24
48-XH-200	48	3A	GG	339.57		65	150		65	28
60-XH-200	60	3A	GG	424.47		65	150		65	28
72-XH-200	72	3A	GG	509.36		65	150		65	28
84-XH-200	84	3A	GG	594.25		65	160		65	28
96-XH-200	96	3A	GG	679.15		65	160		65	28

ISO 9001:2015 (Certified Company)

MICRO TECH (INDIA) ENGINEERING

WEBSITE:-


E-MAIL:- microtech77@yahoo.com

MOBILE:- +91 9825869626




XH PITCH


76.2MM BELT WIDT



TYPE - 2F



TYPE - 2WF



TYPE - 3A

XH Pitch Timing pulley - (7/8") 22.22mm										
Suitable for Belt Width XH300 (76.2mm)										
Pulley size	No.Of Teeth	Pulley Type		Pitch Dia.	Flange Dia.	Pulley Width	Hub Dia.		Length	Min. Bore
Size	Teeth	Type	Material	PD	FD	PW	HD	ID	L	B
18-XH-300	18	2F	St	127.34	142	92	85		110	28
20-XH-300	20	2F	St	141.49	155	92	95		110	28
22-XH-300	22	2F	St	155.64	170	92	110		110	28
24-XH-300	24	2F	St	169.79	184	92	125		110	28
26-XH-300	26	2F	St	183.94	198	92	140		110	28
28-XH-300	28	2F	St	198.08	212	92	120		110	28
30-XH-300	30	2WF	GG	212.23	227	92	120		117	28
32-XH-300	32	2WF	GG	226.38	240	92	130		117	28
40-XH-300	40	2WF	GG	282.98	297	92	140		117	28
48-XH-300	48	3A	GG	339.57		92	150		92	32
60-XH-300	60	3A	GG	424.47		92	150		92	32
72-XH-300	72	3A	GG	509.36		92	150		92	32
84-XH-300	84	3A	GG	594.25		92	160		92	32
96-XH-300	96	3A	GG	679.15		92	160		92	32

ISO 9001:2015 (Certified Company)

MICRO TECH (INDIA) ENGINEERING

WEBSITE:-


E-MAIL:- microtech77@yahoo.com

MOBILE:- +91 9825869626




XH PITCH


101.6MM BELT WIDT

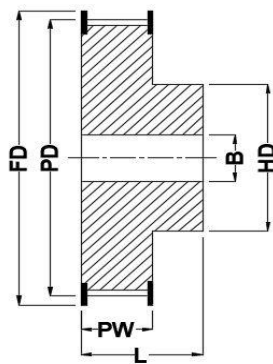

TYPE - 2F

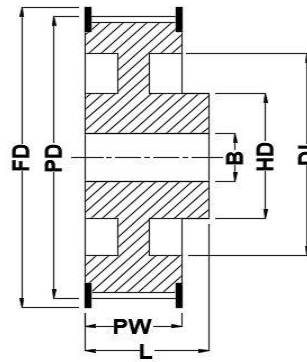

TYPE - 2WF



TYPE - 3A

XH Pitch Timing pulley - (7/8") 22.22mm										
Suitable for Belt Width XH400 (101.6mm)										
Pulley size	No.Of Teeth	Pulley Type		Pitch Dia.	Flange Dia.	Pulley Width	Hub Dia.		Length	Min. Bore
Size	Teeth	Type	Material	PD	FD	PW	HD	ID	L	B
18-XH-400	18	2F	St	127.34	142	118	85		133	32
20-XH-400	20	2F	St	141.49	155	118	95		133	32
22-XH-400	22	2F	St	155.64	170	118	110		133	32
24-XH-400	24	2F	St	169.79	184	118	125		133	32
26-XH-400	26	2F	St	183.94	198	118	140		133	32
28-XH-400	28	2F	St	198.08	212	118	120		133	32
30-XH-400	30	2WF	GG	212.23	227	118	120		138	32
32-XH-400	32	2WF	GG	226.38	240	118	130		138	32
40-XH-400	40	2WF	GG	282.98	297	118	140		138	32
48-XH-400	48	3A	GG	339.57		119	150		119	40
60-XH-400	60	3A	GG	424.47		119	150		119	40
72-XH-400	72	3A	GG	509.36		119	150		119	40
84-XH-400	84	3A	GG	594.25		119	160		119	40
96-XH-400	96	3A	GG	679.15		119	160		119	40

ISO 9001:2015 (Certified Company)

MICRO TECH (INDIA) ENGINEERING

WEBSITE:-


E-MAIL:- microtech77@yahoo.com

MOBILE:- +91 9825869626




XL PITCH

9.5MM BELT WIDTH

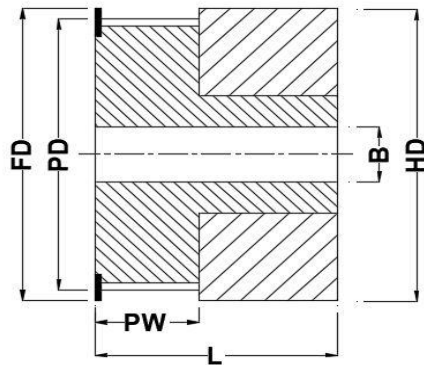

TYPE - 0F

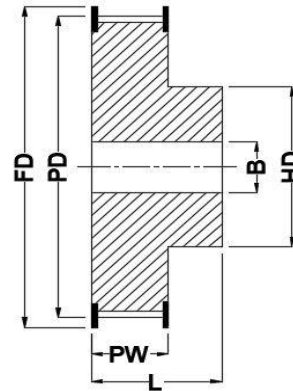

TYPE - 2F

XL Pitch Timing pulley - (1/5") 5.08mm									
Suitable for Belt Width XL037 (9.5mm)									
Pulley size	No. Of Teeth	Pulley Type		Pitch Dia.	Flange Dia.	Pulley Width	Hub Dia.	Length	Min. Bore
Size	Teeth	Type	Material	PD	FD	PW	HD	L	B
10-XL-037	10	0F	Alu	16.17	22	14.3	22.0	20.0	5
11-XL-037	11	0F	Alu	17.79	22	14.3	22.0	20.0	5
12-XL-037	12	0F	Alu	19.40	25	14.3	25.0	20.0	5
14-XL-037	14	0F	Alu	22.64	28	14.3	28.0	20.0	6
15-XL-037	15	2F	Alu	24.26	28	14.3	15.0	20.0	6
16-XL-037	16	2F	Alu	25.87	32	14.3	17.5	20.0	6
18-XL-037	18	2F	Alu	29.11	36	14.3	19.0	20.0	6
20-XL-037	20	2F	Alu	32.34	38	14.3	23.5	22.2	6
21-XL-037	21	2F	Alu	33.96	38	14.3	23.5	22.2	6
22-XL-037	22	2F	Alu	35.57	42	14.3	25.0	22.2	6
24-XL-037	24	2F	Alu	38.81	44	14.3	27.0	22.2	6
26-XL-037	26	2F	Alu	42.04	48	14.3	30.0	22.2	6
28-XL-037	28	2F	Alu	45.28	51	14.3	30.0	22.2	6
30-XL-037	30	2F	Alu	48.51	54	14.3	35.0	22.2	6
32-XL-037	32	2F	Alu	51.74	57	14.3	38.0	25.4	8
36-XL-037	36	2F	Alu	58.21	64	14.3	38.0	25.4	8
40-XL-037	40	2F	Alu	64.68	63	14.3	38.0	25.4	8
42-XL-037	42	2F	Alu	67.91	71	14.3	38.0	25.4	8
44-XL-037	44	2F	Alu	71.15	77	14.3	38.0	25.4	8
48-XL-037	48	2F	Alu	77.62	84	14.3	38.0	25.4	8
60-XL-037	60	2F	Alu	97.02	103	14.3	38.0	25.4	8
72-XL-037	72	2F	Alu	116.43	123	14.3	38.0	25.4	8